PB84-234053

Regulation and Policy Matrix
A Guide to the Rules Governing Grants Awarded Under the Construction Grants Program

(U.S.) Environmental Protection Agency
Washington, DC

Dec 83

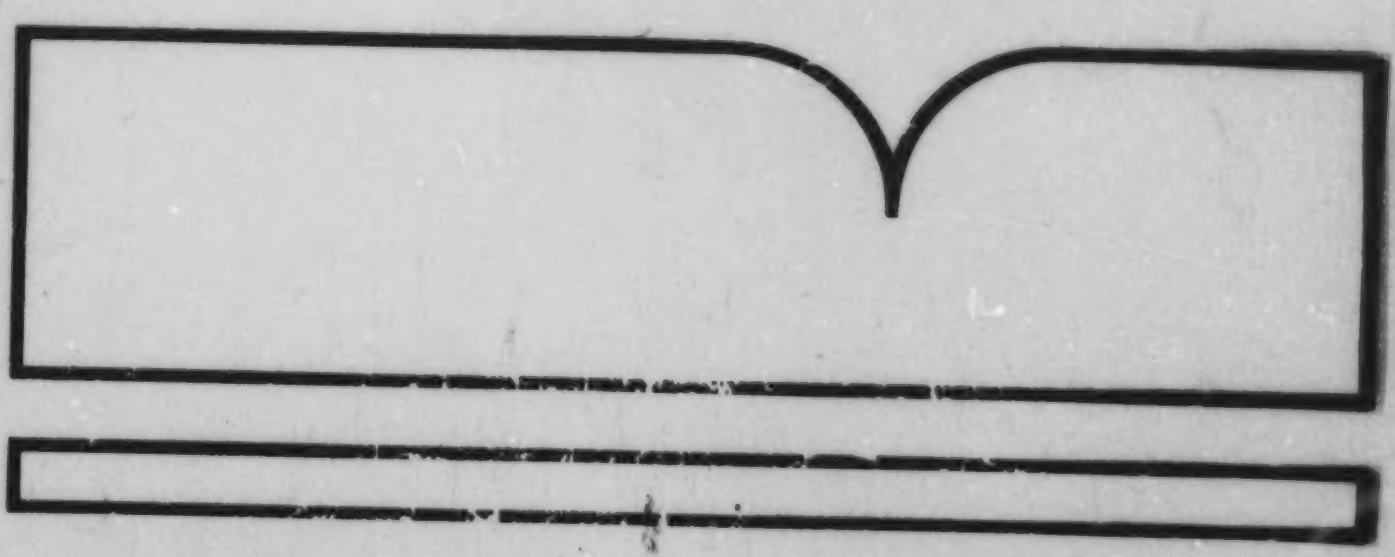

U.S. Department of Commerce
National Technical Information Service
NTIS

TECHNICAL REPORT DATA

(Please read Instructions on the reverse before completing)

1. REPORT NO.	2.	3. RECIPIENT'S ACCESSION NO.
		PB84 234053

4. TITLE AND SUBTITLE	5. REPORT DATE
"Regulation anf Policy Matrix" A guide to the Rules Governing Grants Awarded under the Construction Grants Program	December 1984
	6. PERFORMING ORGANIZATION CODE
7. AUTHOR(S)	8. PERFORMING ORGANIZATION REPORT NO.
9. PERFORMING ORGANIZATION NAME AND ADDRESS Office of Water Program Operations Municipal COnstruction Division U.S. Environmental Protection Agency Washington, D.C. 20460	10. PROGRAM ELEMENT NO. 11. CONTRACT/GRANT NO.
12. SPONSORING AGENCY NAME AND ADDRESS Office of Water Program Operations U.S. Environmental Protection Agency Washington, D.C. 20460	13. TYPE OF REPORT AND PERIOD COVERED 14. SPONSORING AGENCY CODE 700/02

15. SUPPLEMENTARY NOTES

16. ABSTRACT

The "Regulation and Policy Matrix" was developed in responses to a need for an improved method of more readily identifying the U.S. Environmental Protection Agency's (EPA) regulations and policies applicable to grants awarded under the Municipal Construciton Grants Program. The problem of indentifying applicable regulations and policies arises most often at the time of audit, which may take place anywhere from five to ten or more years after initial grant award. When a construction grant project is completed and the grant ready for closing out, auditors, Regional EPA, State and, at times, Corps of Engineer personnel are faced with task of reviewing and confirming (in some cases reconfirming) that costs incurred and claimed by grantees and paid by EPA are, in fact allowable for grant participation. This task can become quite burdensome recognizing that the statutes, regulations, policies and guidance administered by EPA changed significnatly over the then year span between 1972 and 1983 and. during that same period. more than 22,500 grants were awarded.

17. KEY WORDS AND DOCUMENT ANALYSIS

a. DESCRIPTORS	b. IDENTIFIERS/OPEN ENDED TERMS	c. COSATI Field/Group
Construction Grants Regulation		

18. DISTRIBUTION STATEMENT	19. SECURITY CLASS *(This Report)*	21. NO. OF PAGES
	non-sensitive	
	20. SECURITY CLASS *(This page)* non-sensitive	22. PRICE

EPA Form 2220-1 (Rev. 4-77) PREVIOUS EDITION IS OBSOLETE

United States
Environmental Protection
Agency

Office of Water
Program Operations (WH-547)
Washington DC 20460

December 1983

PB84-234053

EPA

Regulation and Policy Matrix

A Guide to the Rules Governing Grants Awarded under the Construction Grants Program

REPRODUCED BY
NATIONAL TECHNICAL
INFORMATION SERVICE
U.S. DEPARTMENT OF COMMERCE
SPRINGFIELD, VA. 22161

REGULATION AND POLICY MATRIX

A Guide to the Rules Governing Grants Awarded Under the Construction Grants Program

Prepared for:

Municipal Construction Division
Office of Water Program Operations
Office of Water
U.S. Environmental Protection Agency

Prepared by:

Contractor: Roy F. Weston, Inc.
Subcontractor: A. T. Bowyer, Inc.

TABLE OF CONTENTS

	Page
INTRODUCTION	1
METHODOLOGY	2
CODE OF FEDERAL REGULATIONS	4
A. Federal Register (FR)	4
B. Bound CFR	5
USE OF REGULATION MATRIX	7
INCLUDED REGULATIONS	8
MATRIX KEY	9
POLICY MATRIXES	10
A. Background	10
B. Use of Policy Matrixes	11
C. Included Policy Issuances	12
HANDBOOK OF PROCEDURES	12
A. Handbook Updates	13
B. Use of Handbook Matrix	14
AUDIT RESOLUTION BOARD	14
BOARD OF ASSISTANCE APPEALS	15
USE OF REGULATION MATRIX - EXAMPLES	16
REGULATION MATRIX	19
SUBJECT INDEX PROGRAM ISSUANCES	81
POLICY MATRIXES	86
All Regional Construction Grants Memorandum (CG) 1970-1971	87
Program Memorandum (PM) 1972-1973	94
Program Guidance Memorandum (PG) 1973-1976	98
Program Requirements Memoranda (PRM) 1976-1981	109
Handbook of Procedures	116
Audit Resolution Board (ARB)	118
APPENDIX A - Board of Assistance Appeals—Subject Index and Chronological Listing	

INTRODUCTION

The "Regulation and Policy Matrix" was developed in response to a need for an improved method of more readily identifying the U.S. Environmental Protection Agency's (EPA) regulations and policies applicable to grants awarded under the Municipal Construction Grants Program. The problem of identifying applicable regulations and policies arises most often at the time of audit, which may take place anywhere from five to ten or more years after initial grant award. When a construction grant project is completed and the grant ready for closing out, auditors, Regional EPA, State, and, at times, Corps of Engineer personnel are faced with the task of reviewing and confirming (in some cases reconfirming) that costs incurred and claimed by grantees and paid by EPA are, in fact, allowable for grant participation. This task can become quite burdensome recognizing that the statutes, regulations, policies and guidance administered by EPA changed significantly over the ten year span between 1972 and 1983 and, during that same period, more than 22,500 grants were awarded.

In addition, because of the potential impacts of wastewater treatment works projects upon the environment and economy, grant recipients are required to comply with 54 other Federal laws and Executive Orders, not the least of which is the National Environmental Policy Act. Consequently, the programmatic regulations, 40 CFR Part 35, have been changed at least 50 times since 1972. In addition, other regulations which directly impact the Construction Grants Program (e.g., 40 CFR Parts 6, 25, 30, 33 and 403) have also been changed on many occasions, thereby creating difficulty in determining which regulations were in effect at the time a specific grant was awarded.

At a "Task Force Meeting on Audit Issues" held in August 1982, and attended by EPA personnel from all Regions and Headquarters, it was recommended that EPA, "develop a matrix for illustrating grant requirements in relation to time of grant award." It was felt that the advantages of the matrix were that it would: (a) provide everyone in the grants program with a standard for systematically applying requirements and retrieving data; (b) reduce long term resources needed in research into and resolution of issues; and (c) not need to be changed, but merely added to, as new requirements are implemented.

Typically, the average length of time for an EPA grant-assisted project to proceed through planning, design and construction is about eight years. Generally, audits of projects are carried out after completion of construction and may be performed ten years or more after some of the costs were incurred. During this period the regulations of the Agency will have changed, and it is frequently difficult to determine which requirements were in effect at what time. In addition, since many of the projects now subject

to audit were undertaken during a period when three separate grants were awarded (Step 1 for planning, Step 2 for design, and Step 3 for construction), each of the separate grant awards may be subject to different regulations. In some cases regulations were promulgated but were retroactive to earlier projects necessitating a careful review of the costs incurred against a later requirement.

Hence, this "Regulation and Policy Matrix" was developed in order to clearly delineate the applicable regulations and policies in effect at the time of each grant award, so that both auditors and construction grant personnel would have an accurate and complete body of knowledge concerning which regulations and policies were in effect during the life of each project.

METHODOLOGY

In developing the construction grant regulation and policy matrix, it was imperative that all applicable regulations and policy documents be incorporated into the matrix. At the same time, it was recognized that such a matrix, if it attempted to summarize all available information, would of necessity be so voluminous that it would be cumbersome and unworkable. Therefore, both at the initial stages and during preparation of the regulation and policy matrix, the question of volume and includable material was constantly reviewed with the intent of achieving a proper balance between volume/complexity and brevity/simplicity.

In reviewing the available reference documents, the contractor's project office, Albert T. Bowyer, was faced with a large volume of source materials, including Federal statutes and their legislative histories, Federal regulations, program policy issuances (CG's, PG's, PRM's, etc.), the *Handbook of Procedures* (MCD-03), guidance documents (*Facilities Planning 1981, Construction Grants 1982*, etc.), Board of Assistance Appeals decisions, Audit Resolution Board decisions, Federal court decisions, uncodified Headquarters policy memoranda in response to specific projects or requests, and technical guidance documents (e.g., *Innovative and Alternative Technology Assessment Manual, Handbook for Sewer System Evaluation and Rehabilitation*, etc.) Confronted with the need to strike a balance between volume/complexity and brevity/simplicity, it was decided that the regulation and policy matrix would be limited to pertinent portions of EPA regulations, codified policy issuances (PG's, PRM's, etc.), the *Handbook of Procedures*, and Audit Resolution Board decisions. In addition, it was decided that since an index to Board of Assistance Appeals decisions was already available, it should be appended to the matrix in its existing form.

An initial draft matrix was limited to 40 CFR Parts 30 and 35, until a decision could be reached on the most useful format for

the matrix. The development of this initial draft matrix was followed by the expansion of the matrix to also include other applicable parts of 40 CFR, which was followed in turn by the inclusion of EPA policy directives in the matrix. After the draft matrix was completed, it was reviewed by a special task force comprised of Headquarters and Regional representatives. Albert L. Pelmoter, Chief, Program Policy Branch, Municipal Construction Division and Project Manager for the "Matrix," served as chairman, and Thomas J. Moran, Senior Engineer, Program Policy Branch, served as task manager. Roger A. Janson, Chief, Grants Operations Section, Region I, took the lead in coordinating Regional review and followup, which greatly expedited and improved the overall review process. As a result of this review, the matrix was expanded to include 40 CFR Part 4 and its format was altered to further simplify its use.

CODE OF FEDERAL REGULATIONS

As most users of this regulation and policy matrix are aware, the *Code of Federal Regulations* (CFR) is a codification of the general and permanent rules published in the *Federal Register* by the executive departments and agencies of the Federal government. The CFR contains 50 titles covering various subjects or departments; for example, Title 3—The President; Title 10—Energy; Title 32—National Defense, etc. In practically all cases involving the Municipal Constructiln Grants Program, applicable regulations will be found in Title 40—Protection of Environment. On a few occasions, other titles may be of interest such as application of Federal cost principles (Title 41—Public Contracts and Property Management).

Title 40—Protection of Environment is further subdivided into chapters (Chatper I concerns the EPA), parts, subparts, sections, subsections, etc. However, since "part numbers" are unique to each "title," reference to regulations need only abbreviate the title, part number and section and/or subsection number for easy identification. For example, 40 CFR 35.917-1 (beginning after February 11, 1974) means Title 40, Part 35, Section .917, Subsection 1 and is entitled "Content of Facilities Plan."

A. *Federal Register* (FR)

The *Federal Register* is used by the Federal government to transmit information to the general public and interest groups concerning the workings of government. The FR is published daily during normal work days and contains, among other things, regulations for various agencies. In the ideal situation after enactment of a Federal law, the implementing agency publishes in the FR a notice of proposed rule-making. At this stage the text of proposed rules and regulations may be published in full or their availability may be announced. Very often proposed regulations contain a preamble which describes the basis (Federal law, Executive Order, court ruling, etc.) for the regulations, provides background information, describes alternative approaches considered and the reason for the selection of the proposed rule, and provides a comment period during which interested parties may submit their comments in writing or at public hearings. Proposed rules and regulations have no legal status in terms of requirements to be imposed upon, in the case of the Construction Grants Program, grant applicants or grantees.

Proposed regulations are most ideally followed by interim regulations (in some cases interim/final) which as the name implies serve during the period between enactment of a Federal law and the publication of "final" regulations. Interim regulations, once promulgated, have the force and effect of law and serve as official Agency policy until superseded or amended by the final regulations. Interim regulations appear in the FR

and also include a preamble and a comment period as with the proposed regulations.

Final regulations are published in the FR and represent the Agency's final policies and procedures for implementing a federal law, executive order or court order. Once published and after the effective date, the final regulations carry the full force and effect of law. Changes to final regulations may be made only by the chief executive of the Agency and may result in revised regulations (generally preceded by proposed and/or interim) or the issuance of a class deviation. As with both the proposed and interim regulations, the final regulations generally are preceded by a preamble which describes the comments from the public and interest groups and other considerations taken into account as the regulations were finalized.

B. Bound CFR

On an annual basis, Title 40 of the CFR is published in bound form by the General Services Administration. This annual edition reflects changes which have been made to the regulations up to July 1 of the year published (copies are generally not available until September or October allowing for publishing time). The bound copy of the CFR represents a compact republication of all the appropriate regulations which appeared in the *Federal Register* during the preceding twelve month period.

The bound CFR forms the basis for using the regulation matrix contained herein, and familiarity with its contents, user's guide and reference tables is of utmost importance. It is, therefore, recommended that users of this matrix read the introductory pages to a bound copy of 40 CFR as well as review the tables on the last several pages. However, some limitations of the bound CFR are not noted in its introduction but must be understood in order to use the regulation matrix effectively.

The bound CFR does not include:

1. Proposed regulations - proposed regulations have no force and effect in law and are therefore not included.

2. Preambles - as regulations are published in the FR, they generally are preceded by a preamble which provides useful information concerning the regulations; preambles do not appear in the bound CFR.

3. Class deviations - where a temporary or permanent class deviation from the regulations is granted by the chief executive of the Agency, such deviations appear in the FR but are not included in the bound

CFR; if the class deviation eventually results in a change to the regulations, the change will appear in the bound CFR.

4. Superseded regulations - if during a twelve month period interim and final regulations are both promulgated, only the final regulations will appear in the bound CFR assuming that the final regulations were published in the FR before July 1 following the date of interim regulations.

A table of contents is included at the beginning of each "part" in the CFR and is particularly useful in locating the section of interest. In addition, at the beginning of each part or subpart the word "source" is shown followed by the date, FR volume number and FR page number. This will allow the identification of the specific FR issue in which the regulation appeared. For example, the 1978 bound copy of 40 CFR under Subpart E (page 349) reads:

> "Source: Sections 35.900 to 35.935-17, 39 FR 5253, Feb. 11, 1974; 39 FR 15760, May 6, 1974, unless otherwise noted.
>
> Sections 35.936 to 35.959, 40 FR 58604, Dec. 17, 1975, unless otherwise noted."

Thus sections 35.900 to 35.935-17 were published in volume 39 of the *Federal Register* beginning on page 5253 on February 11, 1974, and corrected on May 6, 1974, as noted on page 15760 of the FR. The phrase "unless otherwise noted" means that some sections within the full range of 35.900-35.935-17 may have been amended, and if so they will be followed by another citing. For example, at the conclusion of 35.905-8 (page 352 in the bound CFR) the notation "[43 FR 17703, Apr. 25, 1978]" appears and means that this particular section was amended in volume 43 of the FR on page 17703 dated April 25, 1978.

It is very helpful to understand the "source" instructions since it may be necessary to locate the original publication of the regulation and review the preamble for a discussion of the subject under review.

Another helpful, although somewhat limited, table located in each bound copy of the CFR is the index at the back of each volume entitled "List of CFR Sections Affected." This index lists changes to the sections of 40 CFR beginning with its original publication and indicates, by year, the section number, FR volume and page number when a particular section was added, amended or deleted. Where appropriate, instructive comments are provided. Unfortunately, only section numbers are listed, omitting their titles and the specific date the change appeared in the FR. Therefore, it would be necessary to know, for example, that 35.917-1 is "Contents of Facilities Plan" in order to know that this particular subject had been modified. However, by using

the table of contents at the beginning of each part within the bound CFR and the index at the back, it is possible to identify when a subject under review was amended.

USE OF REGULATION MATRIX

The regulation matrix is designed to overcome some of the limitations of the bound CFR and provide for the efficient and correct identification of applicable regulations. The regulation matrix is designed to identify the regulations which are applicable to any particular grant. It is not intended to answer specific questions concerning allowable or unallowable costs. Rather, these questions must be answered by the user after locating the applicable regulation(s) (or other policy issuances discussed later) and reviewing the pertinent sections.

In order to fully understand the format of the regulation matrix, a brief description of each column is provided below. [1]

Date Heading - Each page of the regulation matrix contains a date such as 1972, 1973...1983, etc. This date identifies which bound copy of 40 CFR is to be used as the initial starting point in locating the applicable regulations. For example, the first page with the heading "1977" means that the user should begin with the 1977 bound version of 40 CFR and note the changes to that publication up to the date of grant award (examples using the regulation matrix are given later).

Date Published in FR - Indicates chronologically the date the regulation was published in the *Federal Register*. In addition, it also includes where appropriate the date published in the FR for both the interim (I) or proposed (P) regulation.

Affected Part and Sections - The first listing is the affected part followed by its title. Where appropriate, the part is followed by the subpart and its title. Again, where appropriate, a further subject description may be included.

After listing the titles of the various parts and subparts, this column indicates whether a regulation is "proposed," "interim," "final," "class deviation," "policy statement" or "information." This is followed by the preamble page number in the FR.

Finally, the section and/or subsection number and heading is given where appropriate. When a significant portion of the regulation has been revised, this column will indicate the inclusive sections omitting the identification of each section and/or subsection.

Effective Date - Indicates the date on which the particular regulation became effective. Very often regulations are published

---

[1] Also see Matrix Key, page 9.

in the FR but do not become effective for a period of 30 to 60 days. At times different sections of the regulations, while published in the FR on the same date, have different effective dates as noted.

Comments - This column provides appropriate commentary concerning the regulations.

INCLUDED REGULATIONS

During the development of the matrix, recommendations were obtained from EPA regional personnel concerning which parts, subparts or policies should be included. Since the primary purpose of the regulation matrix is to assist users in the determination of allowable costs, only those regulations which have a direct bearing upon the issue were included and are as follows:

40 CFR Parts

- 4 - Uniform Relocation Assistance and Real Property Acquisitions Policies Act of 1970
- 6 - National Environmental Policy Act
- 25 - Public Participation
- 29 - Intergovernmental Review of Environmental Protection Agency Programs and Activities
- 30 - General Grant Regulations and Procedures
- 33 - Procurement Under Assistance Agreements
- 35 - State and Local Assistance
  - Subpart C - Grants for Construction of Wastewater Treatment Works
  - Subpart D - Reimbursement Grants
  - Subpart E - Grants for Construction of Treatment Works - Clean Water Act
  - Subpart I - Grants for Construction of Treatment Works
- 128) - Pretreatment Standards
  403)
- 133 - Secondary Treatment Information

Applicable Deviations from Regulations

Policy statements concerning the use of minority, women's and small business enterprises are not included in the matrix.

MATRIX KEY

Date Published in F.R.	Affected Part and Sections	Effective Date
8/17/73	Part 133 - Secondary Treatment Information	8/17/73
(P) 4/20/73	Sec. 133.100-133.104	
	Final	
	Preamble FR p. 22298	
8/21/73	Part 35 - State and Local Assistance	8/21/73
(P) 5/22/73	Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972)	However retroactive to 3/2/73
	Sec. 35.901-35.935-13, Appendix B	
	Final	
	Preamble FR p. 22524	
9/10/73	Part 35 - State and Local Assistance	10/10/73
(P) 7/3/73	Appendix A - Cost-Effectiveness Analysis	
	Final	
	Preamble FR p. 24638	
9/26/73	Part 35 - State and Local Assistance	9/26/73
(P) 6/26/73	Subpart D - Reimbursement Grants - Eligibility Requirements	
	Sec. 35.850-35.895	
	Final	
	Preamble FR p. 26882	

Effective date of regulation; may or may not coincide with date published in *Federal Register*

Affected part number and title within Title 40 of the *Code of Federal Regulations*

Inclusive sections within the part as published in the regulations

Date regulation published in the *Federal Register*; may or may not coincide with effective date

Date of proposed (P) regulation; may also indicate date of interim (I) or final (F) regulations

Indicates whether regulation is proposed, interim, interim/final or final

Indicates the first page number of the preamble to the regulation as it appeared in the *Federal Register*

POLICY MATRIXES

The policy matrix portion of this manual consists of four separate matrixes covering the calendar years 1970 through 1980. During this ten year period, day-to-day guidance memoranda issued from EPA Headquarters to EPA regional offices assumed various titles and numbering systems. While the memoranda do not carry the legal weight of law or regulations, EPA regional and state agency personnel were told directly or through implication that for their purposes they should administer the instructions or policy in these memoranda as if they were regulations. For this reason many of the EPA regional personnel will have based their decisions concerning eligibility/allowability upon the information contained in the memoranda.

A. Background

From 1970 to 1972 the memoranda were referred to as "All Regional Construction Grants Memorandum" (abbreviated CG) and numbered by calendar year and sequential issuance, e.g., CG 70-1 was the first memorandum issued in calendar year 1970. In 1972 the title "CG" was changed to "Program Memorandum" (PM) but the numbering system was retained.

In May 1973 a new name and numbering system was introduced. "Program Guidance Memorandum" or "PG's" began May 16, 1973, and continued in numerical sequence up to PG-68 issued May 7, 1976, i.e., without making a differentiation as to the year issued other than the date of the specific PG.

In July 1976 an entirely new system of field communications was introduced and included "Program Requirements Memoranda" (PRM's), "Program Operation Memoranda" (POM's) and "Transmittal Memoranda" (TM's). PRM's were used to convey program policy specifically applicable to the Construction Grants Program and in general had an interest and circulation both within and outside EPA. POM's, on the other hand, were internal communications which set forth periodic reporting requirements, ceilings, quotas and other "housekeeping" items and generally were of interest only to those within EPA. TM's were transmittal memoranda which forwarded changes (insert replacement pages) to the *Handbook of Procedures* (MCD-03). A full explanation of the PRM, POM and TM system is provided in the PRM first issuance, namely, PRM 76-1 dated July 26, 1972. As with earlier systems, the PRM system employed a calendar year/sequential numbering system (because of internal and external review of draft PRM's, the specific date of individual issuances may be different from their assigned numbering, e.g., PRM 78-1 is actually dated December 29, 1977).

On July 26, 1976, PRM 76-2 was issued and announced the cancellation of certain outdated or superseded PG's and renumbered retained PG's as PRM's beginning with the prefix 75-n. Therefore,

PRM's 75-1 through 75-40 reflect earlier PG's which remained applicable to new or existing grants. It should be noted that no official cancellation procedure was issued concerning PM's and CG's.

On January 1, 1981, PRM 81-1 announced that EPA proposed to publish PRM's on an annual (fiscal year) basis only in order to eliminate confusion as to their retroactive application and also to correspond with new appropriation authority. In addition, PRM 81-1 also included a listing of cancelled PRM's and provided, where appropriate, an explanation of the reason for cancellation. However, the PRM also announced that certain PRM's were to be discontinued or cancelled with the publication of (then pending) *Facilities Planning 1981*.

Facilities Planning 1981 (FRD-20) dated March 1981 included as Appendix D the same listing of cancelled PRM's contained in PRM 81-1 but also explained that several PRM's were not cancelled but rather were "integrated into *Facilities Planning 1981*." While it was the intent of EPA at that time to issue a companion document to *Facilities Planning 1981* covering guidance for Step 2 (design) and Step 3 (construction) activities, amendments to the Clean Water Act of 1977 necessitated a complete restructuring of the regulations and guidance resulting in the publication of a new guidance document, *Construction Grants 1982 (CG-82)—Interim Final*, dated July 1982.

In the foreword to CG-82 EPA stated its intention to simplify and deregulate the Construction Grants Program to the maximum extent possible. CG-82 was to serve as guidance, not regulation in disguise, and "...upon publication of CG-82, all PRM's and POM's are cancelled..." (underscoring added). The effect of this statement was to terminate the formal field communication system and rely more specifically on regulation while providing considerable flexibility to the states and EPA regions concerning day-to-day operations.

B. Use of Policy Matrixes

All CG's, PM's, PG's and PRM's cited in the matrix are listed in an index preceding the matrixes and are classified into one or more of eleven subject categories. The subjects have been broadly defined and listed alphabetically beginning with Administrative/Policy and ending with User Charge/Industrial Cost Recovery. Within each category the individual subjects are listed alphabetically using an abbreviated subject reference. The abbreviated subject reference represents a shortening of the complete subject title or the subject of most importance discussed in the memorandum or the *Handbook of Procedures*. The first step, therefore, in using the policy matrixes is to review the subject index and locate the memorandum of interest.

After identifying the subject of interest, the index notes the memorandum as CG, PM, PG, PRM or Handbook (discussed later) followed by its number and date. From this information more details of the particular memorandum may be located in the appropriate matrix.

Each policy matrix lists the memorandum number in the first column followed by the date of issuance. The third column is the complete title of the memorandum.

Column four in all of the policy matrixes provides additional information indicating whether and when the memorandum was cancelled (C), superseded (SS) or supplemented (SP). The reference indicates other memoranda (CG, PM, etc.), *Facilities Planning 1981* (FP-81) or *Construction Grants 1982* (CG-82). The last column in the matrixes contains appropriate comments to help determine if it is necessary to locate and read the full memorandum.

The PG matrix has one additional column not included in the other matrixes, namely, "Redesignated PRM No." As explained above, former PG's were renumbered as PRM's and assigned new numbers each beginning with the prefix 75-n.

C. Included Policy Issuances

As with the regulation matrix, the primary purpose of the policy matrixes is to assist users in the determination of allowable costs. For this reason only those policy issuances which have a direct bearing upon allowability are included. Therefore, where sequential numbers are missing, it may be assumed that the memorandum does not contain information concerning allowable costs.

HANDBOOK OF PROCEDURES

The *Handbook of Procedures—Construction Grants Program for Municipal Wastewater Treatment Works* (MCD-03) was originally published in February 1976 (an earlier edition was published in 1967 after enactment of the 1966 Amendments to the Federal Water Pollution Control Act; the 1967 edition does not include nor was it amended to include provisions of the Federal Water Pollution Control Act Amendments of 1972, P.L. 92-500). The intent of the Handbook was to "...establish uniform national operating standards which can be readily adopted" and "...is organized for the processing of grants as of July 1, 1975."

The Handbook was written primarily to assist project officers in performing their review of grantee documents. It was not intended to introduce new program policies or requirements but rather to illustrate how existing policies and requirements were implemented during review. For this reason it can generally be stated that the Handbook merely restates program policies which originated in other official documents, communications or regulations.

One notable exception to the above, however, is the section in Chapter VII entitled "Allowable and Unallowable Costs." Included therein is a listing (and a brief explanation regarding their allowability/unallowability) of miscellaneous cost items, i.e., items for which questions regarding their allowability arose regularly during project closeout. At the time the Handbook was being prepared, these items, as a group, were not addressed in any other Agency document and it was decided to include them in the Handbook. The interpretation of their allowability had been agreed upon by program staff and resulted from years of experience in having made and defended these determinations previously. Over the years the items of cost listed in Chapter VII of the Handbook have been cited frequently by auditors, both because of their ease of location and clarity and because decisions on a few of the items had no "direct" basis in the regulations.

A. Handbook Updates

The Handbook was updated on three separate occasions using the "Transmittal Memorandum" (TM) mechanism (see Chapter I, page I-5, item 5, Updating, of the Handbook for an explanation of the "TM" system). The TM numbers and dates are listed below.

Transmittal Memorandum No. 76-1 dated August 1976

Transmittal Memorandum No. 77-1 dated December 1976

Transmittal Memorandum No. 78-1 dated December 1977

For ease of reference each revised page to be inserted in the Handbook was appropriately identified; for example, the bottom right of each revised page indicates:

Revised: TM 77-1
December 1976

The second edition of the *Handbook of Procedures* dated 1980 (an interim [draft] issuance was published in the fall of 1979) replaces the first edition and reflects laws, regulations and policies in effect as of October 1, 1979. The second edition of the Handbook was necessitated primarily because of the significant amendments introduced into the Construction Grants Program by the Clean Water Act of 1977. As with the first edition, Chapter VII of the second edition entitled "Financial Considerations" contains most of the information which will be of interest to users of this manual. The section of Chapter VII, "Allowability of Miscellaneous Costs," was expanded to include 42 specific items as compared with 35 in the first edition.

The second edition of the Handbook was not updated during its life using the TM mechanism and became obsolete with the passage of the 1981 amendments to the Clean Water Act. However, during its useful life the facilities planning portion (Chapter IV)

was supplemented by the publication of *Facilities Planning 1981* (FRD-20) dated March 1981.

With the passage of the 1981 amendments to the Clean Water Act (P.L. 97-117 enacted December 29, 1981) it was necessary to completely revise the implementing regulations, and on May 12, 1982, new interim Part 35 Subpart I regulations were promulgated for the Construction Grants Program. Appendix A to these regulations entitled "Determination of Allowable Costs" replaces the corresponding sections in Chapter VII of the *Handbook of Procedures*. In addition, a supplementary guidance document, *Construction Grants 1982* (CG-82), was also published in July 1982 and provides step-by-step guidance for preparation and review of construction grants projects.

B. Use of Handbook Matrix

The Handbook matrix lists the 42 specific subjects discussed in the second edition. The subjects included in the Handbook matrix are also included in the "Subject Index—Program Issuances" since the Handbook determinations are often based upon policy memoranda. The columns following the subject contain checkmarks (✓) which indicate if the particular subject was included in the first edition or any of the three TM's. For example, the subject "Site Acquisition vs. Site Preparation Costs" was included in the first edition, amended by both TM 76-1 and TM 77-1 and is also included in the second edition.

The column "TM No. 76-1" contains an asterisk which is explained on the bottom of the second page of the matrix. In essence, the TM indicates that the list of allowable/unallowable costs is retroactively applicable to projects funded under P.L. 84-660 (1956 Federal Water Pollution Control Act) as well as those funded under P.L. 92-500 (1972 amendments). However, where prior commitments have already been made, the commitments should be taken into account as final allowability determinations are made.

AUDIT RESOLUTION BOARD

The Audit Resolution Board (ARB) was established under EPA Order 2750.2A to resolve cases in which the Inspector General is dissatisfied with the Action Official's disposition of an audit finding. These cases usually stem from irreconcilable differences of opinion between the Action Official (usually a Regional Administrator) and the Inspector General. The Board, meeting as necessary to consider cases referred by the Inspector General, determines the official Agency position, and its policy decisions are final and not subject to further review within the EPA. The Board presently consists of four Agency officials: the Assistant Administrator for Administration (Chairperson), the EPA General Counsel, the Assistant Administrator for the specific program for which the audit was conducted, and a Regional Administrator serving a one year rotating term.

As of November 1983 the ARB had issued nine decisions, with another case (ARB-5) under further study, and two other cases (ARB-7 and -12) resolved by other means. The ARB decision matrix consists of two pages indicating the decision number, date, title, effective date and appropriate comments. By its very nature an ARB decision addresses an issue which is not clearly obvious from a review of grant regulations or other policy memoranda. Therefore, it is recommended that if an issue under review has also been the subject of an ARB decision, the user obtain and review a copy of the ARB decision and its supporting documentation.

BOARD OF ASSISTANCE APPEALS

The Board of Assistance Appeals (BAA) hears cases brought by grantees in accordance with the EPA's disputes provisions (40 CFR Part 30, Subpart J Disputes, 30.1100-30.1150 and 40 CFR 35.960) as supplemented by *EPA Disputes Procedures* (Volume 44, *Federal Register* page 46770 dated August 8, 1979). The Board, after reviewing briefs and other documentation from both the grantee, EPA regional office and other interested parties and/or holding a hearing, renders a decision for the instant case.

Decisions handed down by the BAA are project specific but may include issues which are applicable to other projects. From 1976 through May 1983, 171 decisions have been rendered by BAA with approximately 90 percent of these decisions emanating from construction grant projects. On average the decisions are seven pages long with the format reflecting legal briefs, i.e., citation references to earlier decisions, regulations, quotations from grantee and Agency briefs, etc.

The BAA has prepared both a subject index and a chronological list of decisions (as of May 1983), both of which are included as Appendix A to this publication. The subject index includes 13 major subjects with multiple subheadings followed by the docket numbers. The chronological listing includes the docket number, case name and date of decision.

Regional EPA construction grants personnel have indicated that the BAA decisions are not cited as frequently as regulations, policy memoranda guidance documents or ARB decisions when issues are raised between EPA auditors and construction grants personnel. Therefore, a separate matrix for BAA decisions using the format in this manual has not been prepared.

USE OF REGULATION MATRIX

EXAMPLE 1:

Grant awarded October 15, 1977. Using the regulation matrix, identify the applicable regulations in 40 CFR Part 35, Subpart E.

1. Because the grant was awarded in October 1977, begin with the regulation matrix dated "1977" (page 45 in manual).

2. The 1977 regulation matrix indicates that between July 1, 1977, and October 15, 1977, only one change was made to Part 35, namely, a class deviation dated August 31, 1977.

3. A review of the description of the class deviation in the matrix indicates:

   a. Only the subjects user charges (UC) and industrial cost recovery (ICR), operation and maintenance manual and sewer use ordinance are affected.

   b. The deviation is further limited to modification of the payment limitations.

4. Unless the issue under review concerns the subjects discussed in the class deviation, the 1977 edition of 40 CFR contains the applicable regulations for Part 35, Subpart E.

5. In the event that it is desirable to review the preamble to the applicable Part 35, Subpart E regulations (recall that preambles are not published in the bound CFR), it is necessary to review page 331 of the 1977 edition of 40 CFR and note:

   "Source: Sections 35.900 to 35.935-17, 39 FR 5253, Feb. 11, 1974; 39 FR 15760, May 6, 1974, unless otherwise noted.

   Sections 35.936 to 35.939, 40 FR 58604, Dec. 17, 1975, unless otherwise noted."

6. Sections 35.900 to 35.935-17 were originally published in the *Federal Register* on February 11, 1974, with portions modified on May 6, 1974. Sections 35.936 to 35.939 (procurement) were published on December 17, 1975. Using the regulation matrix for 1973 (page 24 of the manual), it may be determined when the proposed, interim and final regulations were published and the page number for the preamble. In addition, the matrix indicates that the May 6, 1974, changes to Part 35, Subpart E were technical corrections. In like fashion, the matrix may be used to determine additional information concerning the procurement regulation (35.936-35.939) dated December 17, 1975. The retrieval of the *Federal Registers* as identified above will include the desired preambles.

EXAMPLE 2:

Grant awarded May 1, 1974. Audit issue concerns recipient's procedure and cost incurred with regard to purchase of land to be used as an integral part of the wastewater treatment process. Using the regulation and policy matrixes, identify the applicable regulations in 40 CFR Part 35 and Part 4 as well as applicable policies.

1. Because the grant was awarded in May 1974, begin with the regulation matrix dated "1973" (page 24 in manual).

2. The 1973 regulation matrix indicates that between July 1, 1973, and May 1, 1974, twelve changes were made to the construction grants regulations of which five were made to Part 35, Subpart E, and one change to Part 4. It would be inefficient to use the 1973 edition of 40 CFR and note all the changes.

3. Using an alternate approach, use the 1974 edition of 40 CFR, and using the 1973 regulation matrix note changes between May 1, 1974, and June 30, 1974. The effect of this approach is to subtract later regulations after the date of grant award.

4. Using the alternate approach in item 3 above, the 1973 regulation matrix indicates two changes to Part 35, Subpart E after May 1, 1974. The matrix further describes the changes as technical corrections (May 6, 1974) and a class deviation allowing the use of force account labor (May 5, 1974). Since neither of these changes to Part 35, Subpart E affects land acquisition by a grant recipient, the applicable regulations for Part 35, Subpart E, and Part 4 are as contained in the 1974 edition of 40 CFR.

5. In the event that it is necessary to review the preamble to the applicable Part 35, Subpart E regulations, using the 1974 edition of 40 CFR and noting that the practice during the earlier years was to list the "source" at the beginning of the entire part rather than at each subpart, it is noted (page 155 of the 1974 edition of 40 CFR):

> "Source: ...
> Subpart E (§§35.900 to 35.960) at 39 FR 5253, Feb. 11, 1974; 39 FR 15760, May 6, 1974."

From this information a decription of the regulation may be reviewed in the matrix or a copy of the appropriate *Federal Register* may be reyiewed. Using the identical procedures, it is noted that Part 4 was amended on May 19, 1974, as shown both in the regulation matrix and the 1974 edition of 40 CFR Part 4 (page 37).

6. Using the Subject Index for the policy matrixes and reviewing the various subject headings, under Allowability/Eligibility the subject land eligibility is listed. The program issuances which discuss this subject are:

PG-49 which was not dated
PG-67 dated 4/2/76
PRM 77-5 dated 12/15/76
PRM 78-4 dated 2/17/78
Handbook

The dates for three of the policy issuances are well after the date of the grant award and, therefore, are not applicable (prudence may suggest reviewing the appropriate matrix to ensure the policy was not retroactive). While PG-49 is not dated, the PG matrix indicates PG-47 is dated March 11, 1975, and PG-50 is dated June 6, 1975, and it may be reasonably assumed that PG-49 was issued during 1975, and therefore not applicable.

The Handbook matrix includes the subject "Site Acquisition vs. Site Preparation Cost" which is included in both editions. Looking up this subject in the first edition of the Handbook, it is noted that the basis or references are the four policy issuances cited above with the same conclusion to be drawn.

7. Since the above policy issuances and Handbook references under the Subject Index "land eligibility" are not applicable due to their dates of publication, it is prudent to look for other possible subject headings and note the dates, For example, possible policy issuance candidates are:

a. Easements, PRM 77-6, 5/4/77 - not applicable as issued after grant award.

b. Allowable Costs, PG-64, 2/5/76 - not applicable as issued after grant award.

c. Eligible Costs, CG 70-26, 11/9/70 - not applicable as it predates passage of P.L. 92-500.

d. Certificate as to Title to Project Site, Handbook - not applicable as Handbook issued after grant award.

By using this procedure and reviewing the policy matrixes, it is possible to determine if the subject under review is addressed in a policy issuance.

8. In the absence of specific policy guidance, it may be necessary to rely upon the broad retroactivity statement given in both PG 64 and the first TM to the Handbook. That policy indicates that the cost items listed in the Handbook and PG 64 are applicable to both P.L. 84-660 (1956) and P.L. 92-500 (1972) projects. However, the policy also states that, "In making eligibility determinations, consideration should be given to commitments previously made to grantees in the absence of prior National policy, pertinent statutes or regulations."

1971*

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
8/24/71 (I) 11/25/71 (I) 3/19/74	Part 4 - Interim Regulations and Procedures Implementing the Uniform Relocation Assistance and Real Property Acquisition Act of 1970 Sec. 4.1-4.263, Appendix A Interim Preamble FR p. 16626	8/24/71	The regulations provide for, "...the uniform and equitable treatment of persons displaced from their homes, businesses or farms by federal and federally-assisted projects and establishes an equitable land acquisition policy for federal and federally-assisted programs;" this publication is the first major printing of these regulations by EPA (no proposed regulations issued).
11/25/71	Title 40 - Protection of Environment Chapter I - Environmental Protection Agency Reorganization and Republication Preamble FR p. 22369 Subchapter B - Grants Preamble FR p. 22369	N/A	Under the authority of Reorganization Plan No. 3 of 1970, "...a variety of activities related to pollution abatement control were transferred to the Environmental Protection Agency. Regulations issued by the Environmental Protection Agency were published in various titles of the *Code of Federal Regulations*. Such regulations are being reorganized and transferred to Chapter I of Title 40 - Protection of Environment. All amendments to these regulations are included in this republication through November 4, 1971." "Subchapter B, Title 40 is hereby reserved for all regulations pertaining to Grants of the Environmental Protection Agency. Previously published grant regulations are hereby removed from the *Code of Federal Regulations*, but are retained in force as uncodified regulations. Grant regulations thus affected are as follows: Title 18, Part 601 - Grants for water pollution control..."

* The first bound copy of 40 CFR is dated January 1, 1972, i.e., there is no 1971 edition.

1971 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
11/25/71 (I) 8/24/71 (I) 3/19/74	Part 4 - Interim Regulations and Procedures Implementing the Uniform Relocation Assistance and Real Property Acquisition Act of 1970	N/A	Part 4 (along with other parts of Title 40) republished in the *Federal Register* without "substantive changes;" the reprinting allows for the consolidation of many regulations in one document.
11/27/71 (I) 6/9/72 (P) 8/1/73 (F) 5/8/75	Part 30 - General Grant Regulations and Procedures Sec. 30.100-30.1001-3 Interim Preamble FR p. 22716	1/1/72	Previously published regulations (grants for water pollution control, 18 CFR Part 601) revoked 11/25/71 but maintained as uncodified regulations and used provided not inconsistent with this Part 30; new Part 30 effective for previously awarded grants to the extent not inconsistent with terms and conditions of such grants.

40 CFR Protection of Environment

Revised January 1, 1972

1972

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
1/20/72 (I) 1/17/73 (P) 7/17/74 (F) 4/14/75	Part 6 - Environmental Impact Statements Sec. 6.1-6.67 Proposed Preamble FR p. 879	N/A	Proposed regulations implementing the National Environmental Policy Act of 1969 in accordance with E.O. 11514 and the Council on Environmental Quality's Guidelines of 4/23/71.
6/9/72 (I) 11/27/71 (F) 5/8/75	Part 30 - General Grant Regulations and Procedures . Interim Preamble FR p. 11650	7/1/72	"This amendment, which does not substantially change the provisions of Part 30, consists of technical revisions, corrections or typographical errors and clarifications..."
	30.102 Applicability and scope		Eliminates word "will" as a reference to future and makes regulations applicable to all grants as of 7/1/72.
	30.401 Statutory conditions (g) and (h)		Requires compliance with OMB Circular A-95, i.e., clearinghouse comments procedures.
	30.602 Payment		Payments to be as provided, "by this subchapter and in the grant agreement" rather than by "the regulation."
	30.603 Grant related income		Changes reference to OMB Circular A-102 from A-96.
	30.901 Grant amendments		Changes reference to "authorized representative of grantee" from "project manager on behalf of the grantee."

1972 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
6/9/72	Part 35 - State and Local Assistance Interim Preamble FR p. 11650	7/1/72	Previously published regulations (grants for water pollution control, 18 CFR Part 601) removed from CFR 11/25/71 but maintained as uncodified regulations and used provided not inconsistent with Part 30; new Part 35 may be applicable to grants awarded prior to 7/1/72 by explicit incorporation through grant amendment; all grants including construction grants awarded after 7/1/72 subject to revised Part 30 and new Part 35.
	Subpart C - Grants for Construction of Wastewater Treatment Works Sec. 35.800-35.850		This publication of Subpart C represents the first republication of regulations for the Construction Grants Program under Title 40; Subpart C relates to grants for construction of treatment works under Section 8 of the Federal Water Pollution Act as amended, i.e., PL 84-660 projects; in general these regulations "constitute a more explicit statement of prior regulations or of previously uncodified policies, procedures and terms of the respective grants program."
10/18/72	The Federal Water Pollution Control Act Amendments of 1972 (FWPCAA of 1972), PL 92-500	10/18/72	The FWPCAA of 1972 represents a significant commitment on the part of the federal government to abate water pollution. The Act, among other things, introduces the three-step grant process, expands the types of eligible projects, increases the federal grant share to 75% and commits billions of dollars to the restoration of the nation's waters.
1/17/73 (P) 1/20/72 (P) 7/17/74 (F) 4/14/75	Part 6 - Preparation of Environmental Impact Statements Sec. 6.10-6.95 Interim Preamble FR p. 1696	2/16/73	These regulations represent EPA's implementation of the National Environmental Policy Act of 1969. Subpart E - Guidelines for Preparation of Environmental Impact Statements for Wastewater Treatment Works and Associated Plans directly relates to the Construction Grants Program.

1972 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
1/17/73	Part 6 - Continued 6.25 Applicability (c) Retroactive application		These regulations shall be applied to projects for which grants were awarded prior to the publication of these guidelines, "...when substantial funds have not been released and modifications or alternatives to the project are still available."
	6.55 Procedures for preparation of impact statements for plans		This section represents the first EPA regulatory requirement for grantees to prepare environmental assessments and conduct a public hearing.
2/28/73 (F) 2/11/74	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972) Sec. 35.900-35.955 Interim Preamble FR p. 5329	2/28/73	Subpart E only concerns grants awarded pursuant to the FWPCAA of 1972 (PL 92-500) using fiscal year 1973 and later contractual obligation authority; previous construction grants regulations (Subpart C, 35.800-35.850) are applicable to previously awarded construction grants and will remain in effect; grants may not be awarded after 7/1/73 unless the grantee demonstrates that the sewer system is not subject to excessive infiltration; grants awarded after 3/1/73 require grantee to adopt a user charge/industrial cost recovery system; grants awarded prior to 3/2/73 are subject to earlier regulations (35.835-5) concerning user charges; promulgation of Subpart E represents the first publication of regulations specifically for construction grants awarded under the FWPCAA of 1972.
3/2/73	Special Note: User Charge/Industrial Cost Recovery	3/2/73	See final regulations published 8/21/73 but retroactive to 3/2/73.

1972 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
5/22/73 (F) 8/21/73	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972) Proposed Preamble FR p. 13524	3/2/73	Proposed regulation concerns only user charge and industrial cost recovery systems; preamble contains discussion of use by grantee of recovered industrial funds; proposes a retroactive effective date of 3/2/73 and states, "Any grants awarded after 3/1/73, but prior to promulgation of final regulations, will be subject to a special grant condition incorporating these proposed regulations by reference."
6/26/73 (F) 9/26/73	Part 35 - State and Local Assistance Subpart D - Reimbursement Grants Sec. 35.850-35.890 Proposed Preamble FR p. 16826	N/A	Discusses eligibility requirements for reimbursement grants applicable to projects on which construction was initiated after 6/30/66 but before 7/1/72; applications must be received by EPA prior to 10/18/73.

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
7/3/73 (F) 9/10/73	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972) Appendix A - Cost-Effectiveness Analysis Guidelines Proposed Preamble FR p. 17736	N/A	Proposed guidelines which, "apply to...the selection of the treatment works which will receive federal grant assistance."
7/9/73 (F) 11/8/73	Part 128 - Pretreatment Standards Sec. 128.100-128.140 Proposed Preamble FR p. 19236	N/A	Proposed pretreatment standards for pollutants introduced into publicly owned treatment works.
8/7/73 (F) 2/11/74 (F) 5/8/75	Part 30 - General Grant Regulations and Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972) Proposed (but may be used as special condition) Preamble FR p. 21342	N/A	Proposed regulations implementing OMB Circular A-102, Attachments A-O; any EPA "grant awarded after publication of the proposed regulation, but prior to the final regulations, may be subject to a special grant condition incorporating these regulations by reference;" only section 35.935-3, Bonding and Insurance, in Subpart E is affected; sixteen sections in Part 30 are affected.

1973 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
8/17/73 (P) 4/20/73	Part 133 - Secondary Treatment Information Sec. 133.100-133.104 Final Preamble FR p. 22298	8/17/73	Provides technical information on the level of effluent quality attainable through application of secondary treatment; refers to 4/20/73 FR proposed rulemaking for description of purposes and intended use of regulation.
8/21/73 (P) 5/22/73	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972) Sec. 35.901-35.935-13, Appendix B Final Preamble FR p. 22524	8/21/73 However retroactive to 3/2/73	Final regulations concerning only user charge and industrial cost recovery systems; appropriate sections between 35.901 and 35.935-13 are revised or added to conform with these regulations; Appendix B provides guidelines for user charge system; reprinted with final Subpart E regulations on 2/11/74; while these regulations are effective immediately, they are applicable to all grants awarded after 3/1/73.
9/10/73 (P) 7/3/73	Part 35 - State and Local Assistance Appendix A - Cost-Effectiveness Analysis Final Preamble FR p. 24638	10/10/73	Cost-effectiveness analysis guidelines; no changes from those proposed on 7/3/73; reprinted with final Subpart E regulations on 2/11/74.
9/26/73 (P) 6/26/73	Part 35 - State and Local Assistance Subpart D - Reimbursement Grants - Eligibility Requirements Sec. 35.850-35.895 Final Preamble FR p. 26882	9/26/73	Discusses eligibility requirements for reimbursement grants and expands eligible period to 1956 from 1966; establishes 9/30/73 as cutoff date for establishing project cost for allocating appropriation for reimbursement grants.

1973 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
10/15/73 (F) 1/29/74	Part 35 - State and Local Assistance Subpart D - Reimbursement Grants; Proposed Priority for Payment of Funds Appropriated by PL 92-399 Sec. 35.875 and 35.880 Proposed Preamble FR p. 28545	N/A	Applications received before 10/18/73 may be amended and resubmitted; removes limitation in 35.880(a) concerning the amount of grant.
11/8/73 (P) 7/19/73	Part 128 - Pretreatment Standards Sec. 128.100-128.140 Final Preamble FR p. 30982	12/10/73	Establishes requirements for pretreatment of nonresidential wastes discharged into publicly owned treatment works.
1/29/74 (P) 10/15/73	Part 35 - State and Local Assistance Subpart D - Reimbursement Grants Sec. 35.850-35.895 Final Preamble FR p. 3677	1/29/74	Changes method of prioritizing funding of certain classes of projects; extends deadline for submission of applications to 1/31/74.
2/11/74 (I) 2/28/73 (P) 8/7/73 (F) 5/6/74	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972)	2/11/74	This regulation represents the reprinting of the complete Subpart E, including appendixes, and includes earlier final regulations for UC/ICR systems (8/21/73) and cost-effectiveness analysis guidelines (9/10/73); the regulation replaces the interim Subpart E regulations (2/28/73)

1973 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
2/11/74	Part 35 - Continued Sec. 35.900-35.960, Appendixes A and B Final Preamble FR p. 5252		and includes several major changes as described in the preamble and following: after initial application, a basic grant is awarded and subsequent related projects are funded through amendment of the basic grant; Step 3 grants need not result in an operable treatment works (PL 93-243, 2/28/73) but may be a "segment" as defined in the regulations; new facilities planning requirements (35.917-.917-9) are set forth but permit a transition period for full compliance with the requirements, i.e., full compliance with facilities planning requirements for Step 1 work initiated after 4/30/74; after 10/31/74 a "plan of study" must be approved prior to initiation of Step 1 work; new procedures established to assure I/I requirements (35.927-5) are met without unnecessary documentation and expense; new provisions added to delineate EPA position with respect to the initiation of project construction prior to grant assistance for Step 1, 2 or 3, i.e., PL 92-500 clearly precludes the type of reimbursement projects previously authorized under former statute (Section 8 of FWPCAA) on which construction was initiated after 6/30/72; "initiation of construction" defined in 35.905-4; Section 35.925-18 sets forth procedures which will phase out the possibility of a reimbursement claim such as (a) eligible Step 1 or 2 work initiated prior to 11/1/74 will be fully reimbursed in conjunction with the next grant award, (b) prior approval required for Step 1 or 2 work initiated after 10/31/74, (c) Step 1 or 2 work initiated after 6/30/75 must be preceded by grant award or in the case of Step 1 work prior approval of a plan of study and request from state for reservation of grant funds; Section 35.930-6 added to clarify EPA is only obligated for initial grant and grantee should control costs and avoid overruns; increased grants

1973 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
2/11/74	Part 35 - Continued		due to overruns must be approved by states from allotted funds; new section added (35.908) to encourage "processes or methods which have been successfully demonstrated under less than full scale conditions may be utilized in the construction of treatment works" which differ from interim regulations which allowed only processes which had been demonstrated under comparable conditions; new section added (35.938) to assure free and open competition among bidders on Step 3 projects and to assure compliance with nonrestrictive specifications provisions; regulations (Subpart D) applicable to grants awarded under Section 8 of the former FWPCAA remain in effect for grants awarded prior to 1/1/73; Subpart E regulations applicable only to grants awarded from FY 1973 and later contractual obligation authority allotments in FWPCAA amendments of 1972 (PL 92-500).
3/19/74 (I) 8/24/71 (I) 11/25/71	Part 4 - Implementation of the Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970 Sec. 4.100-4.608, Appendixes A and B Interim Preamble FR p. 10362	3/19/74	Regulations superseded those published 8/24/71 and 11/25/71 and resulted from guidelines issued by OMB (Circular A-103, 5/1/72) plus experience to date by EPA; only change discussed in the preamble concerns Section 4.600 which has been revised to indicate that the acquisition of easements is subject to the policies and procedures governing land acquisition; no final Part 4 regulation has been issued as of March 1983.

1973 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
5/6/74	Part 35 - State and Local Assistance	2/11/74	Technical and typographical corrections to final Subpart E regulations published on 2/11/74.
(F) 2/11/74	Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972)		
	Technical Corrections to 2/11/74 Regulations		
	Final Preamble FR p. 15760		
	35.917-7 State review and certification of facilities plan		Changes word "agreement" to "agement," the ending of the word management.
	35.935-12 Operation and management		Adds section number and heading.
	35.935-13 User charges and industrial cost recovery (b)(1)		Changes word "precise" to "service."
	35.938-5 Negotiation "g"		Corrects spelling from "atuhorized" to "authorized."
5/7/74	Part 35 - State and Local Assistance	5/7/74	Allows grantees to use force account (grantee employees) for any Step 1, 2 or 3 work with EPA prior written approval provided grantee demonstrates (1) he possesses necessary competency and (2) work can be accomplished more economically using force account.
	Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972)		
	Sec. 35.935 Procurement; nonrestrictive specifications -2(a)		
	Class Deviation		

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
7/17/74 (I) 1/17/73 (F) 4/14/75	Part 6 - Preparation of Environmental Impact Statements Sec. 6.100-6.810 Proposed Preamble FR p. 26254	N/A	Published as proposed because of substantial changes to interim regulations dated 1/17/73.
10/1/74	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972) Sec. 35.912, .913, and .940-1(q) Final Preamble FR p. 35334	10/31/74	Direct costs associated with review functions carried out by states are allowable costs and may be recovered from grant allotments.
11/21/74	Part 35 - State and Local Assistance Subpart D - Reimbursement Grants - Cutoff Date for Submission of Required Information Final Preamble FR p. 40855 35.882 Cutoff date for submission of information	11/21/74	Earlier regulations extended date for receipt of reimbursement grant application to 1/31/74; additional information supporting those applications must be completed and submitted before 1/31/75 or no grant awarded. Cutoff date 1/31/75.

1974 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
4/14/75 (P) 1/20/72 (I) 1/17/73 (P) 7/17/74	Part 6 - Preparation of Environmental Impact Statements Final (complete reprint) Preamble FR p. 16814 6.504 Applicability (c) Retroactive application 6.512 Procedures for implementing NEPA	4/14/75	Final regulations expanded criteria for decision concerning preparation of EIS; issues include: coastal zones, wild and scenic rivers; prime agricultural lands; wildlife habitat; floodplains; revision of definition of primary and secondary impacts; discussion of retroactive application; wetlands; explanation of data required in environmental assessments (energy, land use trends, population projections); consideration of endangered species. New criteria for preparation of EIS not applicable to Step 2 or Step 3 grants awarded before 7/1/75 unless Regional Administrator considers it appropriate; negative declarations issued before 4/14/75 remain in effect. Provides more detailed explanation of data required in environmental assessments.
5/8/75 (I) 11/27/71 (I) 6/9/72 (P) 8/7/73	Part 30 - General Grant Regulations and Procedures Sec. 30.100-30.1150, Appendixes A, B, C Final Preamble FR p. 20232	6/10/75	Major reprint, with changes, of Part 30; expands grantee financial management and property management standards; procurement policies and procedures of interim Part 30 deleted to be replaced by new Part 33 in near future; disputes provisions set forth in new Subpart J; after 6/10/75 applicable to subsequent related grant projects; may be made applicable to projects with grants before 6/10/75 by grant amendment.
5/8/75	Part 35 - State and Local Assistance Final Preamble FR p. 20082	6/10/75	Part 30 completely revised on this same date; this regulation makes technical amendments to Part 35 to reflect correct references to Part 30.
5/9/75 (I) 2/8/77 (F) 6/30/78	Part 33 - Subagreements Proposed Preamble FR p. 20296	N/A	Does not apply to subagreements under grants for construction of treatment works, i.e., 35.938 applies to construction contracts and proposed new 35.937 will apply to personal and professional services.

1974 Continued

Date Published in F.R.-	Affected Part and Sections	Effective Date	Comments
5/9/75 (F) 12/17/75	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972) Sec. 35.937-35.939 Proposed Preamble FR p. 20296	N/A	Procurement of construction and professional services applicable to Construction Grants Program; proposes to delete earlier 35.938 through 35.939.

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
12/17/75	Part 35 - State and Local Assistance	See Below	Applicable only to grants for construction of treatment works including A/E and construction services; Part 33 (when finalized) will apply to ancillary procurements such as legal or accounting services; implements standards from Attachment O to Federal Management Circular 74-7.
(P) 5/9/75	Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972) - Procurement Under Grants for Construction of Treatment Works		
	Sec. 35.936-35.939, 35.965, Appendix D		
	Final Preamble FR p. 58602		
	35.936 Series General Procurement	3/1/76	Consolidates procurement practices scattered in earlier documents and adds new requiremnts; defines and includes small purchases ($10,000 or less); allows states and local governments to use their own procurement systems provided they offer same protection as EPA regulations.
	35.937 Series Architect/ Engineer Procurement	3/1/76	Regulations do not intend "bids" nor require grantees to compare cost proposals from competing firms; price competition is neither prohibited nor encouraged; small communities (population 25,000 or less) exempt from announcement and selection procedures; requires Appendix C-1 provisions (not published as yet) as part of subagreement; prohibits cost-plus-percentage-of-cost and percentage-of-construction-cost type subagreements; requires A/E to submit cost and profit data to grantee; does not establish ranges or ceilings on profits.

1975 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
12/17/75	Part 35 - Continued		
	35.938 Series Construction Procurement	3/1/76	Restatement of 2/11/74 final regulations but adds section on negotiations for change orders including cost review; prompt progress payments; retainage policy; progress payments for specifically manufactured equipment.
	35.939 Series Protests	1/1/76	Delineates more precise procedures for handling protests.
	Appendixes C-1 and C-2 - Required Subagreement Provisions	3/1/76	To be included in A/E and construction subagreements when published (3/4/76).
	Appendix D - EPA Transition Policy - Consulting Engineering Agreements	12/17/75	Finalizes and replaces interim policy of Program Guidance Memorandum 53 issued 7/8/75; applicable only to grants awarded under Subpart E of Part 35; however, in general, some policies and procedures will be applicable to grants under earlier legislation.
3/4/76	Part 35 - State and Local Assistance	3/1/76	Publishes appendixes for inclusion in A/E and construction subagreements after 3/1/76; provides exception for previously negotiated or solicited subagreements.
	Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972) - Required Provisions for Subagreements under Grants for Construction of Treatment Works		
	Appendixes C-1 and C-2		
	Final Preamble FR p. 9340		

1975 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
N/A	Class Deviation Sec. 35.935-13 User charges and industrial cost recovery (a)	5/6/76	80% payment limitation - see 8/31/77 *Federal Register* listing in this matrix.
N/A	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972) Sec. 35.937 Public Notice Sec. 35.937-3 Evaluation of Qualifications Sec. 35.937-4 Solicitation and evaluation of proposals Class Deviation	5/11/76	Allows deviation from the announcement and selection procedures for A/E procurement for grants awarded after 3/1/76 and before 7/1/76 with certain time limitation concerning time of receipt of application by state or EPA.
5/20/76	Part 6 - Preparation of Environmental Impact Statements Sec. 6.106(e) Final Preamble FR p. 20655	5/20/76	Technical amendment to Part 6; requires compliance with OMB's Circular A-95, i.e., clearinghouse comments procedures.

1975 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
5/20/76	Part 30 - General Grant Regulations and Procedures Sec. 30.305-30.305-8 Final Preamble FR p. 20655	5/20/76	Technical amendment to Part 30; amends Section 30.305 for inclusion of OMB's Circular A-95, i.e., clearinghouse comments procedures.
	30.135-3 Allowable Costs		Those eligible, reasonable, necessary and allocable costs permitted under appropriate federal cost principles, in accordance with EPA policy, within scope of project and authorized for EPA participation.
	30.135-8 Eligible Costs		Those costs in which federal participation is authorized pursuant to applicable statute.
	30.135-22 Subagreements		Written agreement between an EPA grantee and another party (other than another public agency); includes contracts and "subcontracts;" deletes words "consultant agreements."
	30.225-3 Allowability of Costs		Deletes (c) related to cost sharing for foreign grants.
	30.710(d) Federal Cost Principles		Adds "and subagreements" and "or 1-15.4 as appropriate."
	30.715-2 Indirect Costs		Revises method for determining indirect costs for grantees and reaffirms applicability of 41 CFR 1-15.2 and 1-15.4 for determination of indirect costs for A/E firms.
	30.720 Cost Sharing		Eliminates exception for cost sharing and requires grantee to share project costs.
5/20/76	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972) Final Preamble FR p. 20655	5/20/76	Technical amendments to Part 35.

1975 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
5/20/76	Part 35 - Continued		
	35.920-3 Contents of Application		(a)(3) and (b)(8) - Requires compliance with OMB's Circular A-95, i.e., clearinghouse comments procedures.
	35.935-15 Utilization of small and minority businesses		Positive efforts shall be made by grantees to utilize small businesses and minority owned businesses as sources of supplies and services.
	Appendix C-2 Required Provisions - Consulting Engineering Agreements		Editorial corrections; clause 10 "Price reduction for defective cost or price data" changes limitation from "$1,000,000" to "$100,000."
	Appendix D-2 Required Provisions - Construction Contracts		Editorial corrections.
6/23/76	Part 35 - State and Local Assistance	N/A	Proposes that all construction grants projects with total grant eligible cost of construction of $10 million or more, excluding cost for interceptors and collector sewers, be subjected to value engineering analysis as part of Step 2 grant. If adopted, applicable to projects for which Step 2 grant applications are received on or after 10/1/76.
(F) 9/23/76	Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972)		
	Proposed Preamble FR p. 25912		

40 CFR Protection of Environment

Revised July 1, 1976

1976

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
7/8/76	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972) Final Preamble FR p. 27966	7/8/76	Gives EPA regional offices authority to extend date for inclusion of Appendixes C-1 and C-2.
7/12/76	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972) Sec. 35.938-6 Progress payments to contractors, (c) Class Deviation	7/12/76	Item (c) "Protection of progress payments made for specifically manufactured equipment" contains two limitations connected by the word "or;" the class deviation eliminates the option and changes the word "or" to "and."
9/20/76	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972) Sec. 35.938-8 Required construction contract provisions (a) Class Deviation	9/20/76	Eliminates the mandatory use of the "General Conditions" portion of the "Contract Documents for Construction of Federally-Assisted Water and Sewer Projects" and makes it optional; future changes to Appendix C-2 will incorporate appropriate conditions.

1976 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
9/23/76	Part 35 - State and Local Assistance	10/26/76	Requires value engineering (VE) for all Step 2 applications with projected total Step 3 grant eligible cost of $10 million or more excluding the cost of interceptors and collectors sewers; applicable to all construction grants projects for which Step 2 grant applications are certified on or after 10/26/76.
(P) 6/23/76	Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972)		
	Final Preamble FR p. 41690		
	35.905-27 Value Engineering (VE)		Definition of VE.
	35.920-3(b)(9) Contents of Application		Requires VE as part of Step 2 application for projects with allowable cost greater than $10 million.
	35.925-7 Design		Requires VE as a limitation on award of grant.
	35.926 Value Engineering (VE)		Discusses proposal for VE and scope of analysis.
	35.935-18 Value Engineering (VE)		Makes VE a grant condition.
N/A	Class Deviation	9/30/76	80% payment limitation - see 8/31/77 *Federal Register* listing in this matrix.
	Sec. 35.935-13 User charges and industrial cost recovery (a)		
12/27/76	Part 30 - General Grant Regulations and Procedures	1/1/77	Required changes to comply with OMB's Circular A-110.
	Final Preamble FR p. 56196		
	30.615-1 Method of Payment (a)		"Payment for waste treatment construction grants will be made on a reimbursable basis (see 35.845 and 35.945)."

1976 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
12/27/76	Part 30 - Continued		
	30.620 Grant related income (b)		Grant related income (e.g., sale of byproducts or reports) to be used to support or finance project.
	30.620-2 Royalties received from copyrights and patents		Grantee has no other obligation to EPA for royalties received.
	30.635-5 Property reports (c)		Grantees shall submit annually an inventory of all federally owned property in their possession.
	30.810-1 Definitions (a)		Defines net invoice unit price of property.
	30.810-7 Nonexpendable personal property acquired with federal funds (a)		Concerned with use of property.
	30.810-8 Expendable personal property acquired with grant funds		If residual expendable property exceeds $1,000 at end of project, compensate EPA for its share.
12/29/76	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972) - Subagreements under Grants for Construction of Treatment Works; Technical Amendments Final - Appendixes C-1 and C-2 and related sections of Subpart E Preamble FR p. 56633	2/1/77	Comprehensive discussion of contents of Appendixes C-1 - Required Provisions Consulting Engineering Agreements, and C-2 - Required Provisions - Construction Contracts; major issues discussed: deviations from use of C-1 or C-2 allowed in extraordinary circumstances; reference in C-1 and C-2 to regulations means those in effect on date of contract execution; applicability to construction management contract limited; C-1 provisions apply only to grant eligible work, not all work; added word "omissions" to engineer's responsibility and limited liability for errors beyond engineer's control; limited liability for use of advanced technology; engineer not guarantor or construction contract; provision for change in cost if EPA requirements change; modify termination for convenience; modify

1976 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
12/29/76	Part 35 - Continued		remedies provisions; payments per schedule or monthly; retainage at option of grantee; audit report reviewed by engineer only as related to engineer's work; defective cost or pricing clause applicable only if contract exceeds $100,000; allows grantee to specify percentage of subcontracting, otherwise 30%; reaffirms prohibition of gratuities; prior subagreements may be renegotiated to include new C-1 if desired; adds clauses to C-2 formally contained in mandatory "Contract Documents for Construction of Federally-Assisted Water and Sewer Projects" (class deviation from use of Contract Documents issued 9/20/76); between 9/20/76 and 2/1/77 grantees must assure adequate safeguards.
	35.925-20 Procurement		Requires compliance with procurement provisions prior to grant award.
	35.935-2 Procurement		Grant condition requiring compliance with procurement requirements throughout project.
	35.935-4 State and Local Laws		Deleted as covered in 35.936-2.
	35.935-7 Access		Places responsibility for assuring access on grantee.
	35.935-11 Project changes		Incorporates, for clarification, prior approval for changes greater than $100,000.
	35.935-15 Utilization of small and minority businesses		Deleted as covered in 35.936-7.
	35.937-10 Subagreement payments - architectural or engineering services		Payments per schedule or monthly; retainage if any at option of grantee.

1976 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
12/29/76	Part 35 - Continued		
	35.938-6 Progress payments to contractors		Changes "or" to "and" to provide more protection for progress payments made for specifically manufactured equipment.
	35.938-8 Required construction contract provisions		Revised to require Appendix C-2 in contracts.
	35.945 Grant payments		Revised to conform with other changes and Appendixes C-1 and C-2.
	Appendix C-1, Required Provisions - Consulting Engineering Agreements		Revised and reprinted.
	Appendix C-2, Required Provisions - Construction Contracts		Revised and reprinted.
2/4/77	Part 35 - State and Local Assistance	N/A	Proposed changes to guidelines provide detailed discussion of: population forecasting; reserve capacity; staging of construction; capacity beyond grant eligible cost-effective capacity; interceptor sizing; average daily per capita flows; service life of conveyance pipes (see 2/25/77 for correction).
(I) 4/25/78 (F) 9/27/78	Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972)		
	Appendix A - Cost-Effectiveness Analysis Guidelines		
	Proposed Preamble FR p. 6841		

1976 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
2/7/77 (F) 6/26/78	Part 128 and Part 403 - Pretreatment Standards for Existing Sources and New Sources of Pollution Proposed Preamble FR p. 6476		This proposed regulation, "...sets forth four proposed options reflecting various approaches to establishing and enforcing pretreatment requirements;" the proposed options will be subject to public written comments and a public hearing; indicates that Part 128 will be replaced with a new Part 403.
2/8/77 (P) 5/9/75 (F) 6/30/78	Part 33 - Subagreements Sec. 33.001-33.750, Appendix A Interim Preamble FR p. 8090	3/31/77*	Applicable to all procurement except A/E and construction contracts for grants program (35.936[a]); grants program procurement must comply with 35.936-35.939; modeled after Part 35 procurement regulations; *effective date changed multiple times as follows: on 3/10/77 changed to 5/1/77; on 5/2/77 changed to 6/30/77; on 6/29/77 changed to 10/1/77; on 10/3/77 changed to 3/1/78; on 3/13/78 changed to 10/1/78; on 10/18/78 changed to 2/1/79; on 2/21/79 deferred until further notice.
2/10/77	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972) Sec. 35.925-18(a)(3) Limitation upon project costs incurred prior to award Temporary Class Deviation	N/A	Allows as eligible cost Step 2 design work begun before Step 2 grant award under certain conditions with case-by-case decision by Regional Administrator; deviation expires 9/30/77.

1976 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
2/25/77 (P) 2/4/77 (I) 4/25/78 (F) 9/27/78	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972) Appendix A - Cost-Effectiveness Guidelines g(2)(c) Correction Preamble FR p. 11026	2/25/77	Changed word "of" to "or" to read, "...exceed 10 percent of the total design flow of the treatment works exclusive of the allowance or 25 percent..."
6/29/77	Part 35 - State and Local Assistance Technical Amendments Final Preamble FR p. 33034	6/29/77	Regulation, "...issued to make technical amendments and correct minor errors in 40 CFR Part 35. It makes no substantial changes in regulation..."
	Subpart C - Grants for Construction of Wastewater Treatment Works		Relates to grants for construction of treatment works under Section 8 of the Federal Water Pollution Act, i.e., grants authorized from legislation prior to the major amendments of 1972 (PL 92-500 enacted 10/18/72).
	35.835-2 Basin Control		Refers to 35.150-1 in effect at the time of grant award.
	35.835-3 Regional and metropolitan plan		Refers to 35.150-2 in effect at the time of grant award.
	Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972) 35.939 Protests Sec. 35.939(b)(1), (f)(7), (j)(3) and (k)		Amends the time limitations and other procedural requirements for protests.

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
8/31/77	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (FWPCAA of 1972) Class Deviation Preamble FR p. 43880	See Below	Class deviations concern payment limitations for user charge and industrial cost recovery systems, sewer use ordinance and operation and maintenance manual for segmented or multiple construction projects which have been awarded grants.
	35.935-13 User charges and industrial cost recovery (a)	5/6/76 9/30/76	Limits payments on Step 3 projects until UC/ICR systems approved by EPA; deviation for ICR dated 5/6/76 clarifies regulation for segmented or phased projects and limits 80% payment until segment or phase becomes operational or aggregate of all phases or segments is 80%; same deviation applied to UC system on 9/30/76.
	35.935-12 Operation and maintenance (d) 35.935-11 Sewer use ordinance and evaluation/ rehabilitation program	8/24/77	Limits payments on Step 3 projects until O&M manual and sewer use ordinance approved by EPA; deviation for O&M manual and SUO dated 8/24/77 clarifies regulation for segmented or phased projects and limits payment (80% for SUO; 50% and 90% for O&M manual) as above.
12/27/77	Clean Water Act of 1977 PL 95-217	12/27/77	The Clean Water Act of 1977 was enacted on this date and introduced major amendments to the Federal Water Pollution Control Act of 1972.

1977 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
2/23/78	Part 35 - State and Local Assistance Subpart D - Reimbursement Grants Sec. 35.850-35.880 Final Preamble FR p. 7426	2/23/78	Based on the Clean Water Act of 1977 (amends the FWPCAA of 1972), projects on which construction was initiated after 6/30/72 but before 7/1/73 may be eligible for reimbursement grants; applications must be received by 3/27/78; funds not appropriated as of this date; other changes to this subpart apply to new applications.
4/25/78 (I) 5/18/78 (I) 6/2/78 (F) 9/27/78	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (CWA of 1977) Proposed regulations implementing Clean Water Act of 1977 Preamble FR p. 17690	N/A	Preamble provides detailed discussion of innovative and alternative technology considerations; recreational use and pretreatment; interim/final regulations implementing other provisions of the CWA of 1977 are published on this same date as shown below; these proposed regulations "...should be read with the interim/final regulations..."
4/25/78 (I) 5/18/78 (I) 6/2/78 (F) 9/27/78	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (CWA of 1977) Interim/Final regulations implementing Clean Water Act of 1977 Preamble FR p. 17697	4/25/78	Major issues discussed in the preamble include: state priority; grant eligible categories; land eligibility; individual systems; combined grants (Step 2+3); user charges; industrial cost recovery; Buy American; cost-effectiveness analysis guidelines and reserve capacity; discount rate. While the important subject of innovative/alternative technology is discussed in the proposed regulations of this same date (see above), certain related subjects associated with I/A are included in these interim/final regulations, e.g., land used for composting sludge, individual systems and I/A cost preference.

1977 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
4/25/78	Part 35 - Continued		
	Grant Eligible Categories		
	35.905-03 Treatment works		Primarily discusses eligibility and justification requirements for sewage collection system projects particularly with regard to density of residences per acre; grants for separate storm sewers are prohibited.
	35.925-13 Sewage collection system		
	35.925-21 Storm sewers		
	Land Eligibility		
	35.905-23 Treatment works		Land used for the temporary storage of treated wastewater prior to land application and land used for composting sludge is eligible for grant participation; limits expanded land acquisition eligibility to projects which have not received approval of facilities plans before 12/27/77.
	35.940-3 Cost allowable, if approved		
	Individual Systems		
	35.905-23 Treatment works		Distinguishes between small "publicly" and "privately" owned individual systems and relates definitions to cost preference for alternative technology or unconventional treatment works; principal residences or small commercial establishments must be inhabited before 12/27/77 to be eligible for grant; public body must apply for grant; land for individual systems not eligible for grant; small systems may include septic or cluster systems and pressure and vacuum sewers.
	35.917-1(b) Contents of facilities plans		
	35.918 Individual systems		
	35.918-1 Additional limitations on awards for individual systems		
	35.918-2 Eligible and ineligible costs		Items discussed include: land, in-house systems, site restoration and conveyance pipes.
	35.918-3 Requirements for discharge of effluents		Must meet best practical waste treatment technology (BPWTT) for surface or subsurface disposal.

1977 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
4/25/78	Part 35 - Continued		
	Combined Grants (Step 2+3)		
	35.903(b) Summary of Construction Grants Program		New optional provision for communities with population of 25,000 or less and projects $2 million or less ($3 million in states with unusually high construction costs).
	35.909 Step 2+3 grants		
	35.920-3(d) Contents of Application		
	35.930-1(a)(4) Types of Projects		35.930-1(a)(5) deleted.
	35.935-4 Step 2+3 grants		
	35.935-9 Project completion		
	User Charges		
	35.905-26 User charge		Allows grantees to use ad valorem taxes as a basis for developing its user charge system provided a dedicated ad valorem system was in use on 12/27/77; other limitations on industrial and large commercial users discussed; if a user charge system based on actual use has been approved, may not now substitute a system based on ad valorem taxes; after 6/30/79 no Step 3 grant awarded unless user charge system approved, i.e., development of user charge system becomes Step 2 activity rather than Step 3 activity; for grants awarded after 4/25/78, user charge system must be approved by 6/30/79 or no Step 3 grant.
	35.929 Requirements for user charge system		
	35.929-1 Approval of the user charge system		
	35.929-2 General requirements for all user charge systems		
	35.929-3 Implementation of the user charge system		

1977 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
4/25/78	Part 35 - Continued Industrial Cost Recovery 35.905-6 Industrial cost recovery 35.905-8 Industrial user 35.928 Requirements for an industrial cost recovery system 35.928-1 Approval of the industrial cost recovery system 35.928-2 Use of industrial cost recovery payments 35.928-3 Implementation of the industrial cost recovery system 35.928-4 Moratorium on industrial cost recovery payments		Exempts from industrial cost recovery (ICR) industrial user which discharges the equivalent of 25,000 gallons per day or less of domestic sanitary waste; permits portion of recovery funds to be used for administration of ICR system; places 18 month moratorium (until 6/30/79) on the collection of ICR payments; however, grantees must continue to develop ICR systems during moratorium period; definition of industrial user revised; neither moratorium nor 25,000 gallons per day limitation apply to users of individual systems; after 4/25/78 payments withheld for noncompliance with ICR requirements will be released; after 6/30/79 no Step 3 grant awarded unless ICR system approved, i.e., development of ICR system becomes Step 2 activity rather than Step 3 activity.

1977 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
4/25/78	Part 35 - Continued		
	Requirements for American Materials (Buy American)		
	35.936-13(d) Specifications		No Step 3 grant, for which an application has been received by EPA after 2/1/78, shall be made unless the specifications give preference to domestic construction materials; in general, domestic materials given 6% preference over foreign made materials.
	35.938-9(b)(5) Subcontracts under construction contracts		
	35.939(j)(6)(i) Protests		
	Appendix C-2, Clause 17 Required Provisions - Construction Contracts		
	Cost-Effective Analysis Guidelines and Reserve Capacity		
(P) 2/4/77 (F) 9/27/78	Part 35, Appendix A - Cost-Effectiveness Analysis Guidelines		Cost preference (15%) applied to entire system where innovative or alternative (I/A) technologies represent more than 50% of its cost; where I/A less than 50%, cost preference only applied to replaced components (see proposed regulations of this same date); may use state population forecasts rather than Department of Commerce if year 2000 projection does not exceed Department of Commerce by more than 5% or exceed a 208 agency projection by more than 10%; requires grantee to consider flow reduction methods except where population is 10,000 or less or average daily base flow is 70 gallons/capita/day or less; discount rate at 6-5/8%; for reserve capacity beyond that eligible for grant, grant is based on cost-effective size rather than proportion of cost-effective capacity to design capacity; state cost-effectiveness guidelines may be used provided they are at least as stringent as EPA's and have been subject to a public hearing.

1977 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
5/18/78	Part 35 - State and Local Assistance	5/18/78	Corrections made to the 4/25/78 interim/final regulations; in several locations in the preamble and regulations, a parenthesis was used, "(insert 90 days after effective date);" this correction establishes those dates; in the preamble FR p. 1700, 3rd column, 15th and 16th lines insert 7/24/78.
(P) 4/25/78 (I) 4/25/78 (P) 6/2/78 (F) 9/27/78	Subpart E - Grants for Construction of Treatment Works (CWA of 1977) Interim/Final Preamble FR p. 21460		
	35.928(b) Requirements for an industrial cost recovery system, (a)(2), (b)		Insert date 4/25/78.
	Appendix A - Cost-Effectiveness Analysis Guidelines		
	3. Applicability		Insert date 6/26/78.
	35.909 Step 2+3 grants		Introductory paragraphs (b) and (b)(1) were omitted and now added, i.e., limits Step 2+3 grants to communities with population 25,000 or less.
6/2/78	Part 35 - State and Local Assistance	N/A	The proposed technical amendments to the regulations are numerous and are based on operating experience, PRM's and deviations from existing regulations; the proposed amendments are not derived specifically from the Clean Water Act of 1977; this proposed regulatory change when coupled with the 4/25/78 interim/final regulations forms the basis for the final conformed version of the construction grants regulations; the proposed regulations present the proposed section, each of which is followed by a detailed explanation; while these proposed regulations are not requirements, the discussion of the proposed change may be useful in clarifying a particular issue as it appears in the final conformed version of the Subpart E regulations published 9/27/78.
	Subpart E - Grants for Construction of Treatment Works (CWA of 1977) Proposed Technical Amendments Preamble FR p. 24248		

1977 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
6/26/78 (P) 2/2/77	Part 403 - General Pretreatment Regulations for Existing and New Sources of Pollution Final Preamble FR p. 27736	8/25/78	Replaces earlier pretreatment regulations (40 CFR Part 128); applicable to publicly owned treatment works (POTW's) with a design flow of 5 million gallons per day or more; funding for development of a pretreatment program may be through the Construction Grants Program; these final regulations are a major reprint of EPA's pretreatment requirements.
6/30/78	Part 30 - General Grant Regulations and Procedures Final Preamble FR p. 28484	6/30/78	These miscellaneous amendments include new provisions and correct others to conform with revised regulations from Part 35; selected amendments which impact the Construction Grants Program are shown at left.
	30.135-22 Subagreements		Revised definition.
	30.345-4 Costs incurred prior to execution		Costs incurred prior to execution of grant agreement by EPA are generally not allowable.
	30.410-2 Executive Order 11988		Concerns floodplains and requires evaluation to minimize harm.
	30.410-5 Executive Order 11990		New section concerning protection of wetlands.
	30.430 Noncompliance		Revises sanctions against grantees for noncompliance.
	30.610 Rebudgeting of funds		Changes limits for notification of rebudgeting to $1,000 from $500; also modifies conditions for prior approval prior to rebudgeting.
	30.615-3 Withholding of funds		Removes a 10% limit and allows amount necessary to assure compliance with grant conditions or regulations.
	30.620-3 Interest earned on grant funds		Reaffirms that interest earned on grant funds must be returned to EPA; provides exceptions for states and tribal organizations.
	30.615 Force account work		Adds reference to provisions in 35.936-14 - force account work.

1977 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
6/30/78	Part 30 - Continued		
	30.705 Allowable costs		Requires costs to be authorized by applicable statutory provisions.
	30.705-1 Payment to consultants		New section limits payment for individual consultants to equivalent of GS-18 rate; does not limit payment for negotiated contracts with engineering or other firms.
	30.715-2 Indirect costs		Completely revises this section and provides guidelines to be used for determining allowability of indirect costs.
	30.720 Cost sharing (c)		Requires that grants from other federal government be authorized by law or regulations for that specific purpose.
	30.725-4 Requirements (c)		Changes limits for formal cost analysis to $150,000 from $100,000.
	30.800 Financial management		Audits must conform to generally accepted auditing standards.
	30.805 Records (c)		Restructures section and defines the three year retention policy as beginning on the date of approval of the final payment request.
	30.810-4 Title of property		Adds limit of $10,000 or more to requirements.
	30.810-5 Real property (d)(2)(ii), (d)(3)		Revises conditions for repayment to federal government when real property is sold which was originally purchased with a federal grant.
	30.820 Audit (b)		Removes reference on timing of audit by EPA.
	30.920-3 Grant termination by EPA (d)		Adds new section (d) concerning the method of termination.
	30.920-5 Annulment of grant (a)(4), (a)(5)		Allows EPA to "unilaterally" annul grant; also adds two additional conditions under which a grant may be annulled.

1977 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
6/30/78	Part 30 - Continued		
	30.1100 Final disputes decision		Completely revises section and includes required language for forwarding decision letter.
6/30/78	Part 33 - Subagreements	Deferred	Note Part 33 effective date deferred until further notice.
(P) 5/9/75 (I) 2/8/77	Final Preamble FR p. 28484		
	33.005 Definitions		Revises definition of subagreement.
	33.142 Payment to consultants		New section limiting individual consultants daily rate to equivalent of GS-18; does not affect negotiated contracts with engineering or other firms.
	33.410-4 Bid guarantee performance bonds		Allows grantees to use their own bonding requirements if approved by EPA and if government's interests are adequately protected; bonding companies must be properly licensed.
	33.510-5 Negotiation (d)		Eliminates requirements for A/E negotiations to be conducted in accordance with the "Brook's Bill."

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
8/7/78 (F) 2/16/79	Part 25 - Public Participation in Programs Under the Resource Conservation and Recovery Act, the Safe Drinking Water Act, and the Clean Water Act Sec. 25.1-25.19 Proposed Preamble FR p. 34794	N/A	Proposed new Part 25 regulations set forth procedures and requirements for public participation including the formation of Citizens Advisory Group; item 7 in the preamble discusses "Reimbursement of participation expenses."
8/7/78 (F) 2/16/79	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (CWA of 1977) Proposed Preamble FR p. 34802	N/A	Proposed revisions to Part 35 to incorporate the requirements for public participation in the proposed Part 25.
9/27/78 (P) 4/25/78 (I) 4/25/78 (I) 5/18/78 (P) 6/2/78	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (CWA of 1977) Sec. 35.900-35.970; Appendixes A, B, C-1, C-2, D, E Final Preamble FR p. 44022	10/1/78	The publication of these final regulations represents a major revision and reprint of the construction grants regulations primarily implementing the provisions of the Clean Water Act of 1977; they also represent a conformed version of the regulations; the preamble to these regulations should be reviewed for all grants awarded after 10/1/78; because of the extensive changes only the major subject areas discussed in the preamble are listed in the left column opposite this comment; item 15, Technical Amendments, contains a long list of changes to the regulations by specific section; the technical amendments should be reviewed carefully.

1978 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
9/27/78	Part 35 - Continued Major Subjects Discussed 1. State Priority 2. Innovative and Alternative Technologies 3. Individual Systems 4. Cost-Effectiveness Analysis Guidelines and Reserve Capacity 5. Grant Eligible Categories 6. Land Eligibility 7. Recreational Use 8. Combined Grants (Step 2+3) 9. Pretreatment 10. Industrial Cost Recovery 11. User Charges 12. Requirements for American Materials (Buy American) 13. Local Assistance 14. Miscellaneous Comments 15. Technical Amendments		

1978 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
11/15/78 (I) 10/7/77	Part 133 - Secondary Treatment Information Regulation - Suspended Solids Limitations for Wastewater Treatment Ponds Final Preamble FR p. 53464	N/A	Sets limits for suspended solids discharged from treatment ponds (or subcategories for ponds) by individual state; the chart included in this regulation was corrected in the *Federal Register* on 11/27/78.
2/16/79 (P) 8/7/78	Part 25 - Public Participation in Programs Under... The Clean Water Act Sec. 25.1-25.14 Final Preamble FR p. 10286	2/16/79	Reasonable out-of-pocket costs for advisory group members are allowable for grant participation (item 15 in preamble).
2/16/79 (P) 8/7/78	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (CWA of 1977) Final Preamble FR p. 10300	2/16/79	Integrates and implements appropriate sections of Part 25, Public Participation, into the Construction Grants Program (Part 35)
4/27/79	Part 30 - General Grant Regulations and Procedures and Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (CWA of 1977) Class Deviation Preamble FR p. 24926	2/15/79	Deviation allows advance payments for EPA share of the cost of relocation assistance.

1978 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
4/27/79	Part 30 - Continued 30.615-1(a) Method of payment 35.945 Grant payments		
6/15/79	Part 125 - Criteria and Standards for the National Pollutant Discharge Elimination System Subpart G - Criteria for Modifying the Secondary Treatment Requirements Under Section 301(h) of the Clean Water Act Sec. 125.56-125.67 Final Preamble FR p. 34784	6/22/79	Implements amendments to the CWA to allow grant applicants to present their case to EPA for less than secondary treatment when discharging into marine waters; preamble contains very extensive discussion of subject; an appendix identified as Part G - Use of Title II Funds, addresses the use of construction grants funds.
6/18/79	Part 6 - Preparation of Environmental Impact Statements Sec. 6.100-6.905 Proposed Preamble FR p. 35158	N/A	Proposed revisions to Part 6; provides uniform application of National Environmental Policy Act to all federal agencies in accordance with regulations promulgated by the Council on Environmental Quality (40 CFR Parts 1500-1508); allows for exemptions under the Construction Grants Program.

1978 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
6/27/79 (7/5/79)	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (CWA of 1977) Miscellaneous Amendments Final Preamble FR p. 37594		Incorrect numbering of the items affected was corrected in FR 7/5/79 p. 39338.
	35.920-3 Contents of application (c)(2)	10/1/79	Adds requirement to include plat of property when Step 3 grant is solely for acquisition of eligible land.
	35.925-15 Treatment of industrial wastes	6/27/79	Changes word "users" to "sources" and renumbers subparagraphs to (a) and (b) from (1) and (2).
	35.925-18 Limitation upon project costs incurred prior to award (b)	10/1/79	Adds requirement for plat for acquisition of eligible land.
	35.930-1 Types of projects (a)(1)	10/1/79	Defers certain requirements when grant is solely for acquisition of eligible land.
	35.936-13 Specifications (c)	10/1/79	Adds sentence, "No experience restriction will be permitted which unnecessarily reduces competition or innovation." This section proposed 9/27/78.
	35.945 Grant payments (g)	10/1/79	New paragraph (g) allows advance payment of relocation assistance.
	Appendix E - Innovative and Alternative Technology Guidelines Paragraph 3b Paragraph 6.3. (1) and (2)	6/27/79	Changes reference to 35.930-5 from 35.930-6. Excludes conventional sewer lines from present worth cost when applying the 15% cost preference.

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
8/8/79	Part 30 - General Grant Regulations and Procedures Subpart J - Disputes, Appeal Procedures Notice of New Procedures with Request for Comment Sec. 101-137 Preamble FR p. 46770	6/29/79	This notice establishes new procedures for filing of appeals by grantees and supplements Subpart J; establishes an EPA Board of Assistance Appeals.
8/22/79	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (CWA of 1977) Class Deviation Preamble FR p. 49303	8/13/79	See further modification to this deviation dated 1/4/80 below.
	35.928-4 Moratorium on industrial cost recovery payments		Extends the date for collecting ICR payments to 12/1/79; on 1/4/80 extended to 6/30/80.
	35.935-13 Submission and approval of user charge systems (a)(2)(i), (b)		Allows release of payments through 12/31/79 for grantees who submitted user charge systems for approval prior to 5/1/79; previously no payments after 6/30/79 unless grantee had approved user charge system.
	35.935-15 Submission and approval of industrial cost recovery system		Extends date for approval of ICR systems to 12/1/79; specific dates for development and approval of ICR systems depends on date of grant award; on 1/4/80 extended to 6/30/80.

1979 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
1/4/80	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (CWA of 1977) Class Deviation	1/4/80	Same as 8/22/79 class deviation except changes dates.
1/22/80	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (CWA of 1977) Class Deviation	1/22/80	Same as 8/22/79 class deviation except clarifies and adds 35.928-4(c)

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
8/11/80	Municipal Wastewater Treatment Works; Construction Grants Limitations Provided by Section 316 of the Clean Water Act Policy and Procedures Preamble FR p. 53382	8/11/80	Allows EPA to withhold, condition or restrict grants where the state implementation plan concerning air pollution is not being implemented; item IV in a reprinted memorandum addresses "allowable construction grants program costs associated with implementation of this air pollution policy."
11/3/80	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (CWA of 1977) Appendix A - Cost-Effectiveness Analysis Guidelines Proposed Preamble FR p. 72984	N/A	Revised guidelines replace the 4% escalation factor for natural gas with escalation factors for all fuels and electricity.
12/5/80	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatmemt Works (CWA of 1977) Class Deviation Preamble FR p. 81567	10/21/80	Immediately implements provisions of PL 96-483.

1980 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
12/5/80	Part 35 - Continued 35.909 Step 2+3 grants (b)(2) 35.920-3 Contents of application (b)(8)(ii) 35.925-11 User charge and industrial cost recovery 35.928 Requirements for an industrial cost recovery system through .928-4 35.935-15 Submission and approval of industrial cost recovery system		Raises dollar ceiling for combination Step 2+3 grants to $4 million ($5 million in high cost states); for Step 2 projects which meet this qualification and already have a grant, they may apply for and add a Step 3 grant. Repeals all ICR requirements retroactive to 12/27/77; ICR funds recovered between 3/1/73 and 12/27/77 to be used in accordance with then applicable regulations; existing work on ICR systems to be terminated and not eligible for grant after 12/31/80.
12/24/80	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (CWA of 1977) Class Deviation Preamble FR p. 84998 35.930-5 Federal share (b)	12/16/80	Allows 85% grants for Step 1 projects which select innovative or alternative technology projects.

1980 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
1/13/81	Part 30 - General Grant Regulations Sec. 30.810-1 Definitions (d) Class Deviation Preamble FR p. 3017	1/14/81	Redefines "nonexpendable personal property" as property with a useful life of at least two years and an acquisition cost of $500 or more.
1/19/81	Responsiveness Summary and Preamble on Public Participation Policy FR p. 5736	1/19/81	EPA's policy for public participation in all EPA programs is set forth; the policy provides guidelines and supplements Part 25 - Public Participation; item 16 in preamble addresses "The Use of Public Funds to Assist the Participating Agency;" item D.3.b.(2)(b) of the policy allows for reimbursing advisory group members of reasonable out-of-pocket expenses that relate to their participation on the advisory group; item F discusses financial assistance to the public.
1/28/81	Part 403 - General Pretreatment Regulations for Existing and New Sources of Pollution Sec. 403.1-403.16; Appendixes A, B, C, D Final Preamble FR p. 9404 Effective date later deferred - FR p. 19936	3/13/81	Pretreatment regulations modified to conform with court actions; complete reprint and lengthy (35 pp.) preamble; item II.A. of the preamble states, "The development of such programs [locally-run pretreatment program] is fundable through construction grants...;" also see class deviation 7/21/81 and proposed/final regulations 10/13/81 and 2/1/82 respectively; regulations dated 9/28/82 and based on court decision made regulations effective retroactive to 3/30/81.

1980 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
4/6/81 (P) 3/2/82 (I) 5/12/82 (F) 3/28/83	Part 33 - Procurement Regulations and Part 35 - Grants for Construction of Treatment Works - Clean Water Act Proposed Rulemaking	N/A	This proposed rulemaking sets forth a preliminary concept paper for implementing OMB's procurement requirements (Attachments O to OMB Circular A-102); encourages grantees to use their own procurement systems if they meet federal minimum requirements.
5/18/81 (P) 11/6/81	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (CWA of 1977) Proposed Preamble FR p. 27314	N/A	Proposed changes implement legislation enacted 10/21/80 (PL 96-483) and other changes EPA deems necessary; implements the 12/5/80 class deviation; however, proposed changes, while extensive, were never finalized because of legislative changes enacted on 12/29/81; portions of these changes also are proposed in the new Subpart I regulations (11/6/81).

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
7/27/81	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (CWA of 1977) Class Deviation Preamble FR p. 38355	N/A	Suspends indefinitely the effective date of the pretreatment program construction grants provisions until EPA makes a final decision on pretreatment program requirements.
	35.920-3 Contents of application (b)(9), (c)(4)		Effective date suspended until further notice.
	35.935-19 Municipal pretreatment program		Suspends the grant payment conditions; effective date suspended until further notice.
10/13/81	Part 403 - General Pretreatment Regulations for Existing and New Sources of Pollution Final Preamble FR p. 50502 Proposed Preamble FR p. 50503	1/31/82	EPA is to reinstate the effective date for the pretreatment program construction grants provisions effective on 1/31/82; however, EPA has also proposed that the effective date or the regulations be modified before the effective date; see regulations 9/28/82 which made regulations effective retroactively to 3/30/81.

1981 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
11/6/81 (P) 5/12/81 (I) 5/12/82	Part 35 - State and Local Assistance Subpart I - Grants for Construction of Treatment Works (CWA of 1977) Sec. 35.2000-35.2350; Appendix A - Determination of Allowable Costs Proposed Preamble FR p. 55220	N/A	Proposed comprehensive revision to the Construction Grants Program regulations; new Appendix A listing allowable costs by type; this regulation was never finalized because of the 12/29/81 amendments to the CWA.
12/29/81	Municipal Wastewater Treatment Construction Grants Amendments of 1981 (PL 97-117)	12/29/81	The 1981 amendments were enacted on this date and introduced major (elimination of Step 1 and Step 2 grants) amendments to the Clean Water Act of 1977.
1/28/82	Part 35 - State and Local Assistance Subpart E - Grants for Construction of Treatment Works (CWA of 1977) Class Deviation Preamble FR p. 4066 35.930-1 Types of projects (a)(1), (a)(2) 35.909 Step 2+3 grants (b)	1/12/82	This class deviation implements important provisions of the 1981 amendments to the Clean Water Act immediately while allowing time for complete revision of the construction grants regulations. Effective 12/30/81 Step 1 and Step 2 grants may not be awarded but an allowance will be provided for planning and design with Step 3 grants. Raises combined Step 2+3 project cost limitation to $8 million; however, Step 2 allowable costs will be based on the allowance determined by Step 3 construction costs.

1981 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
1/28/82	Part 35 - Continued		
	35.936-13 Specifications (a)		Grantees may use one brand name (instead of two) followed by the words "or equal."
2/1/82	Part 403 - General Pretreatment Regulations for Existing and New Sources of Pollution	1/31/82	The provisions of the pretreatment regulations originally published 1/28/81 in the *Federal Register* (FR p. 9404) were postponed and later proposed to become effective on 1/31/82; all sections except those listed at left become effective on 1/31/82; those at left deferred until further notice; see regulations dated 9/28/82 which made regulations effective retroactively to 3/30/81.
	Final Preamble FR p. 4518		
	403.3(i) Definition of Interference	Deferred	
	403.(n) Definition of Pass Through	Deferred	
	403.(e) Combined Wastestream Formula	Deferred	
	403.7 Revision of Categorical Pretreatment Standards to Reflect POTW Removal of Pollutants	Deferred	
3/2/82	Part 33 - Procurement Under Assistance Agreements	N/A	These proposed procurement regulations will eventually replace the construction grants procurement regulations (35.936-35.939); the regulations implement Attachment O to OMB's Circular A-102.
(P) 4/6/81 (I) 5/12/82 (F) 3/28/83	Sec. 33.001-33.1135 Proposed Preamble FR p. 8960		

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
3/8/82 (I) 1/7/83	Part 6 - Implementation of Procedures on the National Environmental Policy Act Interim Preamble FR p. 9827 6.103 Responsibilities (a)(1)(iii)-(vi) 6.105 Synopsis of EIS Procedures (b) 6.107 Categorical exclusions 6.400 Public involvement (f) 6.502 Applicability 6.503 Consultation during the environmental review process 6.504 Public participation 6.505 Limitations on actions during environmental review process 6.506 Criteria for preparing EIS's and granting categorical exclusions 6.507 Environmental review process 6.508 Limits on delegation to states	3/8/82	Amendments to Part 6 primarily provide for categorical exclusions from substantive environmental review for certain types of projects, i.e., for projects which are small scale, minor and routine (e.g., replacement, minor rehabilitation, minor expansion, minor upgrading not resulting in increasing the sizes of sewers or treatment plant); grantees may be granted an exclusion and therefore will not have to prepare an environmental information document as part of facilities planning; sections affected by the implementation of the categorical exclusion are listed in the left column.

1981 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
5/12/82 (P) 3/2/82 (F) 3/28/83	Part 33 - Procurement Under Assistance Agreements Sec. 33.001-33.1135; Appendix A Interim/Final Preamble FR p. 20474	5/12/82	This procurement regulation is effective for projects for which grants are awarded after 5/12/82; earlier procurement regulations in 40 CFR Part 35, Subpart E, Sections 35.936, .937, .938 and .939 remain applicable to projects for which grants were awarded prior to 5/12/82; the regulation supplements new construction grants regulations published this same date as Part 35, Subpart I; this regulation is based on Attachment O to OMB's Circular A-102 and emphasizes use of grantee's procurement system if it meets minimum federal standards; major issues discussed in the preamble include: regulations not applicable to facilities planning nor design as EPA no longer provides grants for these activities; grantees receiving awards prior to 5/12/82 may elect to use these regulations for future procurements; procedures for grantees who cannot certify their own procurement system as meeting requirements of Part 33; discussion of single material specifications and its restriction on competition; provision for using same A/E who performed facilities planning and design on grant assisted project (Step 3) without further competitive procurement; discussion of interim procedures concerning minority and women's businesses; this regulation is a complete reprint and replaces earlier Part 33.
5/12/82 (P) 11/6/81	Part 35 - State and Local Assistance Subpart I - Grants for Construction of Treatment Works Sec. 35.2000-35.2350; Appendix A Interim/Final Preamble FR p. 20450	5/12/82	The publication of the interim/final regulations represents a major revision and reprinting of new construction grants regulations and primarily implements provisions of the "Municipal Wastewater Treatment Construction Grants Amendments of 1981" (PL 97-117); they significantly amend the Construction Grants Program, among other things, eliminating facilities planning (Step 1) and design (Step 2) grants and replacing the grants with an allowance at the time of construction (Step 3) grant award. The preamble to these regulations should be reviewed for all

1981 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
5/12/82	Part 35 - Continued		grants awarded after 5/12/82. Because of the extensive changes only the major subject areas discussed in the preamble are listed in the left column opposite this comment. Appendix A to these regulations assembles in one location a listing of allowable and unallowable project costs. The preamble also contains a table which cross references the new Subpart I (35.2000 series) to the earlier Subpart E (35.900 series).
	Major Subjects Described		
	1. Effective Date		Subpart I regulations applicable to grants made after 5/12/82; earlier grants continue to be subject to Subpart E.
	2. Allowance		An allowance for facilities planning and design will be included with a construction (Step 3) grant; procurement regulations (new Part 33) not applicable to facilities planning nor design.
	3. Advances		Advances of allowance may be made to small communities with decision solely by states.
	4. Water Quality Emphasis		State to emphasize priority water quality areas when preparing project priority lists.
	5. NEPA Compliance		Grant applicant encouraged to obtain environmental review of projects after completion of facilities planning and before design.
	6. Financial Capability		Grant applicant to demonstrate financial capability before award of grant assistance.
	7. Phased Segmented Projects		States to give priority to completing earlier phased/segmented projects.
	8. Project Performance		Grantees to certify after one year of operation that project meets design specifications; grantee to procure A/E services for first year of operation and costs for these services allowable.

1981 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
5/12/82	Part 35 - Continued		
	9. Step 2+3		Dollar ceiling limitation raised to $8 million; Step 2+3 grants to employ the allowance provisions.
	10. Combined Sewer Overflow		Limited funds for specific state justified projects; after 9/30/84 no longer eligible for grants.
	11. Innovative and Alternative (I/A) Technology		Approved I/A projects eligible for 20% additional grant not to exceed 85% federal share.
	12. State Certification		EPA to act within 45 days after delegated state certification of project compliance with regulations.
	13. Collection Systems		Project category not eligible for grant after 9/30/84 unless Governor elects to approve.
	14. Infiltration/Inflow		Sets numerical limits for nonexcessive I/I; option for grantee not to remove excessive I/I but grant limited to capacity required for 120 gallons/person/day.
	15. Compatible Industrial Wastewater		Establishes eligibility test which stipulates that grants awarded, "...only if the treatment works would be eligible for grant assistance in the absence of the proposed industrial capacity."
	16. Reconstruction Costs		EPA policy not to award "second time" grants for failed projects built with federal grant except for qualifying I/A projects.
	17. Advanced Treatment Reviews		Encourages grant applicants to obtain EPA headquarters review of advanced treatment projects after completion of facilities plans and before design is begun.
	18. Public Participation		EPA prohibited from requiring compliance with public participation regulations (Part 25) during facilities planning and design; encourages voluntary compliance however.

1981 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
5/12/82	Part 35 - Continued		
	19. Delegation		In delegated state, the term "Regional Administrator" in the regulations may be read "state agency."
	20. Project Schedule		Project schedule of key events to be included with application for grant.
	21. Work by Debarred or Suspended Persons		Grant applicants are to certify whether project work was performed by debarred or suspended persons (40 CFR Part 32).
	22. Project, Treatment Works and Complete Treatment System		Clarifies terminology.
	23. Building		Term "building" used throughout regulations rather than "construction" which has broader definition and includes planning and design.
	24. Appendix A: Allowable Costs		New appendix categories costs as: travel, subagreement costs, facilities planning, small systems, equipment, etc.
5/12/82	Part 35 - State and Local Assistance	N/A	Proposed procedures, including tables, for computing the allowance for facilities planning and design based on estimate of project building costs.
	Subpart I - Grants for Construction of Treatment Works		
	Appendix B - Allowance for Facilities Planning and Design		
	Proposed Preamble FR p. 20471		

1981 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
6/18/82 (F) 9/30/83	Part 30 - General Regulations for Assistance Programs Sec. 30.100-30.1210; Appendixes A, B and C Proposed Preamble FR p. 26564	N/A	This proposed regulation represents a major revision to the regulations in order to simplify and make them more readable; major changes concern: Federal Grant and Cooperative Agreement Act; Patent Rights; Property Management; Peer Review of Publications; and Debarment.

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
9/28/82	Part 403 - General Pretreatment Regulations for Existing and New Sources of Pollution Final Preamble FR p. 42688	3/30/81	Based on a court decision the general pretreatment regulations published in the *Federal Register* on 1/28/81 and which were subsequently deferred on several occasions are to become effective retroactively to 3/30/81.
1/7/83 (P) 3/8/82	Part 6 - Procedures for Implementing the National Environmental Policy Act Interim/Final Preamble FR p. 1012	1/7/83	The interim regulations dated 3/8/82 are revised for the criteria related to categorical exclusion from substantative environmental review.
	6.506 Criteria for preparing EIS's and granting categorical exclusions (c)(1)(ii) and (iii) and (c)(2)(iii)		Increases community size criterion to 10,000 from 3,500 population; removes reference to alternative technologies; increases excess capacity to 30% from 20%.
	6.507 Environmental review process		Corrects an error in the 3/8/82 regulations which placed responsibility for preparation of a formal environmental assessment on grantee; responsibility for preparation rests with EPA.

1982 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
1/7/83	Part 6 - Procedures for Implementing the National Environmental Policy Act Subpart E - Environmental Review Procedures for the Wastewater Treatment Construction Grants Program Sec. 6.500-6.514 Proposed Preamble FR p. 1014	N/A	This proposed regulation represents a reordering and clarifying of Subpart E sections related to the Construction Grants Program; the reordering reflects the 1981 amendments which eliminated Step 1 and Step 2 grants and makes the NEPA regulations follow more closely the grant processing procedures; when finalized, will be applicable to projects receiving grants prior to 12/29/81 since there is no substantative change in the environmental review process.
1/24/83 (F) 6/24/83	Part 35 - State and Local Assistance Part 30 - General Regulations for Assistance Programs Proposed Preamble FR p. 3208	N/A	Based on Executive Order 12372, it is proposed to eliminate the clearinghouse review process (commonly referred to as the A-95 review) and replace it with a revised intergovernmental consultation process.
3/28/83 (P) 3/2/82 (I) 5/12/82 (F) 7/1/83	Part 33 - Procurement Under Assistance Agreements Sec. 33.001-33.1145 Appendix A Final Preamble FR p. 12922	3/28/83	Finalizes the interim/final regulations published on 5/12/82; provides optional retroactive application if elected by grantees; major issues discussed in the preamble include: quality assurance requirements for grantee contractors; definition of MBE and WBE firms; grantee reporting requirements even though grantee may have certified procurement system; reconfirmation of prequalified list and prohibition against preference for local or in-state bidders; no EPA mandated goals for MBE or WBE participation; grantee contractors must take MBE and WBE affirmative

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
3/28/83	Part 33 - Continued		action steps only if contractor employes subcontractors; discussion of brand name or equal; personal services rate limited to GS-18 grade for EPA grant; subcontractor requirements not applicable to suppliers of materials or equipment; discussion of procurement and negotiations for A/E services including use of same A/E from Step 1 and Step 2; provision for including labor standards provisions form; eliminates verbal change orders; defective pricing clause limits returned to $100,000 from $500,000; progress payments for manufactured equipment not mandatory; this regulation is a complete reprint and replaces the interim Part 33 (5/12/82). Minor technical and typographical corrections 7/1/83.
6/24/83 (P) 1/24/83	Part 29 - Intergovernmental Review of the Environmental Protection Agency Programs and Activities Sec, 29.1-29.13 Final Preamble FR p. 29288	9/30/83	This new Part 29 of Title 40 implements a new intergovernmental review process and replaces the procedures and requirements contained in OMB's Circular A-95 (clearinghouse reviews). The new review process provides greater flexibility, "...by relying on state and local processes for state and local government coordination and review of proposed federal financial assistance and direct federal development." Among other things, the regulations allow states to select the program to which the state review process will be applicable, establish a "single point of contact" for each state, and prescribe the federal review and response procedures. The regulations implement and satisfy requirements for Executive Order 12372, Intergovernmental Cooperation Act of 1968 and Section 204 of the Demonstration Cities and Metropolitan Development Act of 1966. Also published on this same date is a listing of "Programs and Activities Eligible for Intergovernmental Review Under 40 CFR Part 29 and Subject to Section 204 of the Demonstration Cities and Metropolitan Development Act" (FR p. 29304).

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
7/1/83 (F) 3/28/83	Part 33 - Procurement Under Assistance Agreements Correction Final Preamble FR p. 30364 33.001 Applicability and scope of this Part, (g) 33.211 Recipient reporting requirements, (e) 33.280 Payment to consultants, (a) 33.1016 Labor standards provisions Appendix A, (b)(1)	7/1/83	Minor technical and typographical corrections are made to the 3/28/83 regulations as shown below. Other changes not shown below include minor items such as changing contract to subagreement, singular to plural or vice versa, or correcting reference numbers. In the parenthetical exceptions delete "...§33.211 'Recipient reporting requirements'..." Change word "offerors" to "offers." In the parenthesis delete the words "...contractors and subcontractors..." and insert the word "...consultants..." Add immediately after section heading, "(This clause applies only when required by statute)." After the word "official" insert the dependent clause, "..., unless he instructs otherwise,..."
9/30/83	Part 30 - General Regulation for Assistance Programs Sec. 30.100-30.1235; Appendixes A, B, C, D Final Preamble FR p. 45056	9/30/83	Major reprint of Part 30, "implementing Federal Grant and Cooperative Agreement Act and using plain English;" effective date for Subpart L, Disputes, is 11/1/83; eliminates most EPA internal operating procedures and most of the detailed procedures that explained how recipients comply with specific requirements; includes a table showing the relationship between former and revised Part 30; among the subjects discussed in the preamble, which have a direct bearing on the Construction Grants Program, are: records retention; access to records; property management; project changes; interest charges paid to the government; noncompliance action taken by EPA; appeal and disputes procedures including the elimination of the Board of Assistance Appeals;

1983 Continued

Date Published in F.R.	Affected Part and Sections	Effective Date	Comments
9/30/83	Part 30 - Continued		quality assurance as related to wastewater treatment works and the collection of environmentally related data. This regulation is written in a new question/answer format.

SUBJECT INDEX
PROGRAM ISSUANCES
(CG's, PM's, PG's, PRM's, Handbook)

Administrative/Policy

Applicant Assurances	CG 70-20, 10/13/70
Audits	CG 71-18, 8/20/71
Civil Rights	CG 71-15, 7/26/71; PG-59, 2/11/76
Clearinghouse Review	CG 70-3, 1/21/70
Easements	PRM 77-6, 5/4/77
Grant Payments	PG-9, 7/20/73
Grant Percentage	PG-13, 6/11/73
Increase Grants	PG-8, 7/17/73
Indirect Costs	Handbook
Labor Charges	Handbook
Policy and Guidance	PG-1, 5/16/73
Preapplication	CG 71-22, 12/22/71
Preconstruction Lag	PRM 78-12, 6/12/78; PRM 80-3, 5/30/80
Processing Period	PG-11, 6/12/73
Project Management	CG 71-17, 8/20/71
Retainage	PG-43, 11/13/74
Retroactive Application	PRM 80-6, 7/21/80
Service Charges	Handbook
Time Schedules	CG 70-2, 1/6/70

Allowability/Eligibility

Advanced Treatment	PRM 79-7, 3/9/79
A/E Costs	PRM 80-2, 12/20/79
* Allowable Costs	PG-64, 2/5/76
Bond Costs	CG 70-5, 2/13/70; CG 70-25, 11/11/70; Handbook
Bid Bond Forfeiture	Handbook
Collection System O&M Equipment	Handbook

* Basis for list of allowable costs as contained in the Handbook of Procedures, First Edition.

Allowability/Eligibility (Continued)

Cost Control	PG-57, 9/8/75
Crossover Sewers	Handbook
Cultural Resources	PG-52, 7/7/75; Handbook
Demolition	Handbook
Disaster Grants	CG 71-24, 12/27/71
Eligible Costs	CG 70-26, 11/9/70
Eligibility of Laboratory Chemicals	CG 70-19, 9/29/70; Handbook
Federal Facilities	PG-62, 12/29/75; Handbook
Flood Disaster	PG-25, 3/1/74; PG-25A, 11/4/74
Flood Insurance	PG-54, 7/8/75; PRM 76-5, 8/16/76
Force Account	PG-34, 5/7/74
Funding	PM 72-16, 7/25/75
Funding Sewers	PRM 77-8, 6/21/77; PRM 78-9, 3/8/78
Funding Waste Load	PRM 79-11, 9/5/79
Grantee Workshops	Handbook
Groundwater Monitoring	Handbook
I/I Costs	PM 72-19, 8/17/72; CG 71-23, 12/30/71
Industrial Waste	CG 71-3, 2/25/71; Handbook
Interceptor Sewers	CG 70-23, 10/23/70
Land Eligibility	PG-49 (no date); PG-67, 4/2/76; PRM 77-5, 12/15/76; PRM 78-4, 2/17/78; Handbook
Liquidated Damages	PG 70-24, 11/5/70; Handbook
MBE and WBE Liaison	PRM 80-7, 8/29/80
Mobile Equipment	Handbook
Multiple Purpose Project	PRM 77-4, 12/3/76
NEPA Requirements	PM 72-20, 9/11/72
Office Equipment	Handbook
O & M Manual Costs	PM 72-5, 1/24/72
Processing Period	PG-11, 6/12/73
Project Eligibility	CG 70-18, 9/29/70
Public Liaison Services	Handbook
Public Participation On-Site Visits	Handbook

Allowability/Eligibility (Continued)

Purchase of Treatment Works	CG 71-16, 8/16/71; Handbook
Rate and Financial Studies	Handbook
Recreation, Industrial	PRM 77-1, 11/23/76
Relocation Assistance	Handbook
Replacement Parts	Handbook
Revenue Sharing Funds	PG-3, 6/25/73
Royalties	PRM 79-2, 11/13/78; Handbook
Secondary Treatment	CG 71-20, 12/31/71; PM 72-4, 2/2/72
Seeding - Biological	Handbook
Septic Tank Wastes	CG 71-25, 12/30/71
Shop Furnishings	Handbook
Small Systems	PRM 79-8, 5/31/79
Special Assessment Districts	Handbook
Startup Services	PRM 77-2, 11/29/76; Handbook
State and Federal Regulations	Handbook
State Grants	CG 70-21, 10/13/70; CG 70-22, 10/15/70; CG 71-7, 2/19/71; CG 71-14, 6/30/71
Step 2+3 Grants	PRM 78-7, 2/17/78
Storm/Combined Sewers	CG-61, 12/16/75
Supplemental Grants	CG 71-4, 1/21/71
Title Project Site	Handbook
Tools	Handbook
Travel Costs	Handbook
TV Eligibility	PM 72-10, 4/28/72
Utility Relocation Costs	PM 72-12, 5/16/72; Handbook
Water Treatment	PG-36, 6/5/74; PG-36A, 9/17/74
Women's Businesses	PRM 80-4, 1/31/81

Discount Rate — PG-60, 8/11/75; PRM 78-2, 1/26/78; PRM 79-4, 11/17/78; PRM 80-1, 11/26/79; PRM 81-2, 11/19/80

SUBJECT INDEX (Continued)

Environmental Impacts/Public Participation

Cultural Resources	PG-52, 7/2/75
Environmental Effects	PG-50, 6/6/75
Erosion Control	PRM 78-1, 12/29/77
NEPA Requirements	PM 72-20, 9/11/72
Piggybacking	PG-58, 9/ /75
Presentation of Costs	PRM 76-3, 8/16/76
Public Hearing	PG-10 (no date)

Planning

Basin Planning	PM 72-2, 1/11/72
Comprehensive Plans	CG 71-21, 11/23/71
Facility Plans	PG-51, 6/25/75
Flood Hazard	PG-15, 9/11/73
201 and WQM Planning	PG-47, 3/11/74; PG-66, 2/9/76

Plans, Specifications and Design

Buy American	PRM 78-3, 2/17/78; PRM 80-5, 7/9/80
Chlorine Safety	PRM 79-1, 10/23/78
Construction Incentive	PRM 79-5, 12/28/78
Contract Documents	PG-17, 5/17/73; PG-17A, 4/15/75
Cost Control	PG-57, 9/8/75
Design/Construct	PG-5, 5/31/73
Equipment Prequalifications	PRM 79-10, 7/12/79
Erosion Control	PRM 78-1, 12/29/77
Escalation Clauses	PG-44, 12/9/74
Experience Clause	CG 71-8, 3/15/71; PG-14, 7/11/73
Fringe Benefits	Handbook
Grout	PRM 78-11, 5/11/78
Mercury Seals	CG 71-1, 1/12/71
Nonrestrictive Specifications	PM 73-1, 2/21/73; PG-19, 11/2/73; PG-19A, 8/8/75
Project Sign	CG 71-5, 1/21/71
Redesign/Replanning Costs	Handbook

Plans, Specifications and Design (Continued)

Restoration Streets/Rights-of-Way	Handbook
Safety Specifications	PM 72-6, 2/6/72; PM 72-14, 5/19/72; Handbook
Value Engineering	PG-45, 12/11/74; PG-63, 1/20/76
Wage Rates	CG 71-6, 2/17/71; Handbook

Procurement

A/E costs	PRM 80-2, 12/20/79
Buy American	PRM 78-3, 2/17/78; PRM 80-5, 7/9/80
Contract Award	CG 70-17, 6/18/70
Debarment	PG-56, 8/5/75
Engineering Agreements	PG-53, 7/8/75
Engineering Fees	PG-42, 10/23/74
Escalation Clauses	PG-44, 12/9/74
Fringe Benefits	Handbook
Inspection	Handbook
Reject All Bids	PRM 78-8, 2/13/78

Program Issuances

Cancellation PG's	PRM 76-2, 7/26/76
1969 Issuances	CG 70-1, 1/2/70
1970 Issuances	CG 71-2, 1/20/71
1971 Issuances	CG 71-26, 12/31/71
PRM's	PRM 81-1, 1/7/81
Program Issuances	PM 72-1, 1/6/72; PRM 76-1, 7/26/76

Reimbursement Projects — CG 71-9, 3/31/71; PG-18, 10/30/72; PG-22, 12/21/73; PG-30, 4/17/74; PG-40, 9/24/74; PG-40A, 10/18/74; PG-40B, 11/13/74; PG-40C, 12/4/74; PG-40D, 2/28/75

Treatment/Technical Guidance

Adequacy of Treatment	PM 72-18, 8/17/72; PM 72-21, 10/6/72
Advanced Treatment	PRM 79-7, 3/9/79
Best Practical Waste Treatment Technology (BPWTT)	PG-27, 3/30/74; PG-27A, 4/10/75
Chlorine Safety	PRM 79-1, 10/23/78

Treatment/Technical Guidance (Continued)

Dredge and Fill	PRM 76-4, 10/14/76
Emergency Operation	CG 71-13, 6/15/71
Individual Systems	Handbook
Infiltration/Inflow	PM 72-17, 8/11/72; PM 72-19, 8/17/72; PG-24, 2/7/74; PG-26, 3/15/74; PRM 78-10, 3/17/78
Land Treatment	PRM 79-3, 11/15/78
Ocean Discharges	PM 72-8, 4/19/72
Plan of Operation	PRM 77-3, 11/29/76
Pretreatment	Handbook
Project Segmenting	PG-33, 5/10/74; PM 72-3, 1/13/72; PM 72-15, 6/2/72
Secondary Treatment	CG 71-20, 12/31/71; PM 72-4, 2/2/72
Septic Tank Wastes	CG 71-25, 12/30/71
Sludge Disposal	PM 72-22, 11/2/72
Small Systems	PRM 79-8, 5/9/79
Stabilization Ponds	PG-16, 9/11/73
User Charge/Industrial Cost Recovery	PG-28, 4/5/74; PG-37, 7/9/74; PG-38, 7/16/74; PG-65, 5/17/76; PRM 78-6, 2/17/78

ALL REGIONAL CONSTRUCTION

GRANTS MEMORANDUM (CG)

1970

CG #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Comments
70-1	1/2/70	All-Region Memoranda of 1969		Advises regions that 47 CG's were issued during 1969.
70-2	1/6/70	Approval of Construction Grant Projects Which Will Not Meet Standards, Enforcement, or Other Implementation Schedules		Projects which are ready to proceed but which will obviously not meet time schedules set forth in water quality plans or enforcement actions may be approved with a disclaimer included in the grant offer; projects which do not meet treatment standards are not to be approved.
70-3	1/21/70	Bureau of the Budget Circular No. A-95, Transmittal Memorandum No. 1		Amends Circular A-95 to clarify responsibilities in overlapping clearinghouse areas.
70-5	2/13/70	Uniform Determination of Bond Issue Costs for Construction Grants		Provides guidance on computing eligible bond costs (printing, advertising, issuing and other costs subsequent to the bond election) including a formula to be used where state or other federal funds are also employed.
70-17	6/18/70	Change in Construction Grants Program Handbook, Re "Advertising and Award of Contract"		Modified procurement procedures to require negotiation with all responsible bidders (not just low bidder) when change is required in bids to reduce costs to affordable level.
70-18	9/29/70	Project Eligibility		Sets forth timing criteria for award of impact grants.
70-19	9/29/70	Eligibility of Chemical Costs for Waste Treatment Plant Start-Up		Allows reasonable amount of laboratory chemicals to be included in project as eligible cost.

CG 1970 Continued

CG #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Comments
70-20	10/13/70	State and Local Assurances Under 601.35 of Regulations		Requires grant applicants to assure proper operation and maintenance of completed treatment works; required paragraph to be made part of grant offer and acceptance form.
70-21	10/13/70	Section 8, Federal Water Pollution Control Act: Inadequate State Funds to Match Federal Allocations		Higher percentage grants (40-50% as distinct from 30% grants) may continue to be made in states that have heretofore provided matching grants even if the state has run out of state funds provided sufficient evidence exists to demonstrate that state plans to provide matching grants at some point in future (e.g., new appropriation by state government).
70-22	10/15/70	Retroactive Eligibility for Increased Section 8 Grants		Increased federal grants may be made where the state enacts a matching grant program either from the effective date of the program or the beginning of the current fiscal year.
70-23	10/23/70	Guidelines for Determining Eligibility of Interceptors and Pumping Stations		Guidelines suggest criteria for determining whether a sewer line is an interceptor (eligible for grant) or trunk or lateral sewer (ineligible for grant).
70-24	11/5/70	Deductions for Liquidated Damages When Computing Final Project Eligible Costs		Collected liquidated damages are to be disregarded when computing eligible project costs and resulting federal grant; this changes former policy as contained in Construction Grants *Handbook of Procedures*.
70-25	11/11/70	Interest on Bond Discounts		Interest on bond discounts are not to be considered as part of the cost of construction; grantee sold bonds to construction contractor as means of payment on a particular project.

CG 1970 Continued

CG #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Comments
70-26	11/9/70	Legal, Administrative and Fiscal Costs of Section 8 Projects		Administrative costs attributable to construction of treatment works are eligible for grant participation; general administrative costs for municipal affairs are not eligible; also reiterates earlier decision concerning ineligible costs for interest on borrowing, costs to prepare financial statements for bonds or bonding, fees for bond counsel, tax assessors and tax collectors.

ALL REGIONAL CONSTRUCTION

GRANTS MEMORANDUM (CG)

1971

CG #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Comments
71-1	1/12/71	Grant Eligibility of Conversion of Mercury Seals on Trickling Filters		Grants may be awarded for converting mercury seals on trickling filter type treatment works to mechanical seals; new mercury seals are not eligible for grant participation.
71-2	1/20/71	All-Region Memoranda of 1970		Advises regions that 26 CG's were issued during 1970.
71-3	2/25/71	Industrial Wastes		Supplements interim guidelines and sets forth policy concerning eligibility of projects where a substantial amount of flow is from one or more industries.
71-4	1/28/71	State Matching Grants on EPA Supplemental Projects		Discusses source of funding where EPA grants are supplemented by Economic Development Administration (Department of Commerce) grants.
71-5	1/21/71	Revisions to Project Sign Details		Provides detailed drawing of required project sign which reflects a change of name for EPA.
71-6	2/17/71	Enforcement of Labor Standards		Responsibility for reviewing and checking construction contractor's payroll forms is transferred to grantees.
71-7	2/19/71	Basis of State Participation in Waste Treatment Construction Grants Program	(SP) 6/30/71 CG 71-14	Discussion of state's obligation to make a matching grant in order for applicant to qualify for higher percentage EPA grant; state need only agree to provide financial assistance to all applicants.
71-8	3/15/71	Experience Clause for Equipment Suppliers		Effective immediately experience clauses for equipment suppliers and materials are to be discouraged for grant projects; recommends bonding where additional warranties are required; in exceptional cases, experience clause may be used if justified.

CG 1971 Continued

CG #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Comments
71-9	3/31/71	Special Procedures for Administering the Grant Funds to be Allocated from the $200 Million of FY 1971 Appropriated Funds Earmarked for Reimbursement or Severe Local and Basinwide Water Pollution Problems		Provides special procedures for payments (examples provided) to reimbursable projects recognizing a short time interval for obligation of funds.
71-13	6/15/71	Wastewater Treatment Facilities, Emergency Readiness and Operating Program and Procedures		Transmits guidelines describing the scope of an emergency operating program which should be included as a part of the O&M manual.
71-14	6/30/71	Basis of State Participation in Waste TReatment Construction Grants Program		Clarifies CG 71-7 (2/19/71) indicating that a state's matching grant cannot be a loan but some form of obligation "to pay" by the state.
71-15	7/26/71	Changes in Filing and Approval Requirements for Form T-128, Compliance Report		Advises states and EPA offices to carefully review project information to insure that discrimination is not practiced with regard to a grantee's treatment works project.
71-16	8/16/71	Use of Section 8, FWPCAA Funds to Reimburse Municipalities for the Purchase of Privately-Owned Treatment Facilities		Grant funds may not be used to purchase existing privately-owned treatment facilities.

CG 1971 Continued

CG #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Comments
71-17	8/20/71	Project Management During Construction		Transmits guidelines defining federal-state-local roles in project management; subjects discussed include: preconstruction conference, responsibility, change orders, inspections and reports.
71-18	8/20/71	Final Audit of Facilities Construction Projects		Sets forth procedures between audit and EPA regional offices for requesting and processing audits.
71-20	12/31/71	Secondary Treatment Requirements of 18 CFR 601.25 as Amended July 8, 1971		Grants may be made for projects providing less than secondary treatment where grantee commits to provide secondary treatment in accordance with an acceptable schedule.
71-21	11/23/71	Joint EPA-HUD Supplementary Guidelines for Water Quality Management Planning		Transmits additional guidelines for determining if a project conforms with a comprehensive plan and is therefore eligible for an additional 10% EPA grant.
71-22	12/22/71	Preapplication and Predesign Review for Waste Treatment Works Construction Projects		Sets forth new procedures for review of projects by states and EPA prior to submission of grant application; procedures intended to accelerate future grant awards.
71-23	12/30/71	Predesign Investigation of Sewer Infiltration Problems		Sets forth guidelines for infiltration studies; costs for such studies are eligible design costs; costs for correction (i.e., construction) are eligible provided such work is not considered routine maintenance.
71-24	12/27/71	FWPCAA - Disaster Relief - Eligibility of Projects Damaged by Disasters for FWPCAA Grants		Projects damaged as a result of a disaster are eligible for EPA grants and may be given higher priority by states; all other conditions and limitations of grants must be met.

CG 1971 Continued

CG #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Comments
71-25	12/30/71	Septic Tank Waste Disposal		Grants may be made for treatment facilities, whether separate facilities or portions of larger treatment works, to treat septic tank wastes; grantees must insure however that septic waste haulers pay a fair share of capital and O&M costs.
71-26	12/31/71	All-Region Memoranda of 1971		Advises regions that 26 CG's were issued during 1971.

PROGRAM MEMORANDUM (PM)

1972

PM #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Comments
72-1	1/6/72	Field Communications		Announces change from previous "All Regional Construction Grants Memorandum" (CG's) to new mechanism entitled "Program Memorandum" to communicate program policy and directives to regional offices from headquarters.
72-2	1/11/72	Grant Conditions Concerning Basin Planning		Deletes an earlier requirement for inclusion of a specific paragraph concerning conformance with basin, regional or metropolitan plan in grant offers; requirements now set forth in regulations.
72-3	1/13/72	Project "Splitting"	(SP) 6/2/72 PM 72-15	Grant awards may be made for portions (splitting, segmenting, phasing) of projects where an integral treatment works plan is approved and where good cause exists for such "splitting."
72-4	2/2/72	July 13, 1971 Regulations	(SS) 4/19/72 PM 72-8	Provides further clarification and guidance to the regulation (7/13/71) which requires a minimum of secondary treatment (85% removal of BOD's) for award of grant assistance.
72-5	1/24/72	Cost of Municipal Waste Water Treatment Plant Operation and Maintenance Manuals		Provides cost curves to assist (i.e., guidance) regional offices in establishing the reasonableness of costs to prepare operation and maintenance manuals; these costs are allowable for grant participation.
72-6	2/6/72	Safety and Health Regulations	(SP) 5/16/72 PM 72-14	Transmits copy of safety and health regulations promulgated by the Department of Labor which should (not must) be included in project specifications by reference.

PM 1972 Continued

PM #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Comments
72-8	4/19/72	Definition of "Open Ocean Waters"		Defines exemption from secondary treatment regulations (7/13/71) for ocean discharges.
72-10	4/28/72	Eligibility of Television Surveillance System Costs	(SP) 8/17/72 PM 72-19	Television inspection costs are allowable for grant participation but must be proportioned based on need for startup (eligible), ratio of interceptors (eligible) to collection sewers (ineligible) and operation and maintenance uses (ineligible); case-by-case decisions.
72-12	5/16/72	Allowability of Costs of Removal and Replacement of Telegraph and Utility Lines		Costs to remove and replace in kind telegraph and utility lines necessary to the construction of treatment works are allowable for grant participation; reverses an earlier decision from the Office of General Counsel, Department of Health, Education and Welfare dated 3/31/66.
72-14	5/19/72	Application of Labor Department Health and Safety Regulations		Labor Department standards (contract work hours and safety) must be included in contract between grantee and construction contractor; construction contractor responsible to comply with "Occupational Safety and Health Act of 1970."
72-15	6/2/72	Project "Splitting"		Strengthens the necessity for demonstrating that a project must be split into segments; requires a firm schedule for completion of the entire system resulting in an operable treatment works.
72-16	7/25/72	Region I Questions and Answers		Attaches answers to nine questions raised by Region I; subjects include: definition of initiation of a project, grant shares (percentages) based on pending legislation, use of various FY funds and other funding decisions.

PM 1972 Continued

PM #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Comments
72-17	8/11/72	Extraneous Flow in Waste Treatment Systems		Policy indicates that extraneous flows (infiltration/ inflow) must be either removed or treated (minimum of secondary treatment) or combination of both depending on the results of a cost-effectiveness analysis.
72-18	8/17/72	Clarification of 40 CFR 35.835-4, Adequacy of Treatment	(SP) 10/6/72 PM 72-21	Provides technical clarification concerning an acceptable level of treatment to be eligible for grant award.
72-19	8/17/72	Infiltration/Inflow Grant Costs		Defines the sequential procedural steps for sewer system evaluation studies indicating that reasonable costs essential for the studies are eligible for grant participation; indicates I/I studies may be performed by force account; these guidelines will be used until formal regulations are published.
72-20	9/11/72	NEPA Aspects of the Award and Administration of EPA, State and Local Assistance Grants		Provides detailed guidance and legal opinions concerning the implementation of the National Environmental Policy Act (NEPA) to the Construction Grants Program; in general an environmental review and decision by EPA should precede grant award; also includes discussion of grant amendment, termination and other EPA actions including allowable costs and financial liability.
72-21	10/6/72	40 CFR 35.835-4, Adequacy of Treatment		Indicates studies underway to define more accurately "secondary treatment;" requirements in PM 72-18 (8/17/72) should be used as a design goal rather than an inflexible standard until the issue (do waste stabilization ponds and trickling filters satisfy secondary treatment requirements?) is resolved.
72-22	11/2/72	Handling and Disposal of Sludges from Waste Water Treatment Facilities		Provides technical guidelines concerning the disposal of sludge (raw sludge not to be applied to land nor landfills) and the treatment of sludge liquids.

PROGRAM MEMORANDUM (PM)

1973

PM #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Comments
73-1	2/21/73	Selection of Materials or Equipment		Discusses equipment and material (particularly for sewer pipe) specifications and conditions under which grant participation will be limited to lowest costing product or if justified by grantee more expensive equipment or material.

PROGRAM GUIDANCE MEMORANDUM (PG) 1973-1976

PG #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Redesignated PRM No.	Comments
1	5/16/73	Grants for the Construction of Wastewater Treatment Works	(SP) 6/11/73 PG-13 (SP) 5/31/73 PG-5 (C) 7/26/76 PRM 76-2		This guidance document is long and supplements the interim construction grants regulations (40 CFR Part 35, Subpart E) published 2/28/73; Appendix B is a summary policy and guidance statement addressing the specific requirements which will apply in the immediate future; relevant guidance areas discussed include: facilities planning, secondary treatment, infiltration/inflow, cost-effectiveness guidelines, user charges and industrial cost recovery, pretreatment, plans and specifications requirements, environmental assessments and a tabular summary of construction grants requirements.
3	6/25/73	Use of Revenue Sharing Funds for Waste Treatment Projects	(C) 1/7/81 PRM 81-1	75-1	Revenue sharing funds may not be used for the local share of grant eligible project costs; may be used, however, for unallowable or ineligible items associated with the project.
5	5/31/73	Grants for the Construction of Wastewater Treatment Works	(C) 7/26/76 PRM 76-2		Supplements and further clarifies item IX "plan and specification requirements" of PG-1 with regard to Step 2+3 grants; prohibits "design/construct" grants until guidelines are issued.

PG 1973 Continued

PG #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Redesignated PRM No.	Comments
8	7/17/73	Utilization of Contract Grant Authority Under Title II of PL 92-500 to Increase Grants Awarded Under Section 8 of the Former Federal Water Pollution Control Act	(C) 7/26/76 PRM 76-2		Contractual obligation authority grant funds authorized under the 1972 amendments may not be used to increase grants for projects awarded grants under previous legislation; a separate section of the 1972 amendments sets aside funds for this purpose (reimbursement projects).
9	7/20/73	Revised Policies and Procedures for Grants	(C) 7/26/76 PRM 76-2		Primarily concerns in-house policies and new forms to be used by grantees when requesting payment; payment only made after costs have been incurred, i.e., no advance payments.
10	None	Class Deviation from Regulation 40 CFR 35.925-8	(C) 7/26/76 PRM 76-2		Deviation is granted from the 30 day notice concerning a public hearing where adequate notice has been given for public participation; the deviation expires 7/31/73.
11	6/12/73	Wastewater Treatment Works Construction Grants Extended Administrative Processing Period	(C) 7/26/76 PRM 76-2		Grant award period for FY 73 extended to 7/31/73; however, no grant awarded after 7/1/73 unless grantee demonstrates that the project is not subject to excessive infiltration/inflow.
13	6/11/73	Supplemental Funding, Grant Percentage, Section 202A	(C) 7/26/76 PRM 76-2		Supplements PG-1 and cancels policy in item XI "Supplemental funding;" all grants must be at the 75% level.
14	7/11/73	Experience Clauses for Equipment Suppliers	(C) 1/7/81 PRM 81-1	75-2	In general restates earlier policy (CG 71-8 3/15/71) indicating that restrictive experience clauses are not allowed; if used for good reason, alternate equipment must be considered if supplier is willing to furnish bond or cash deposit against failure.

PG 1973 Continued

PG #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Redesignated PRM No.	Comments
15	9/11/73	Flood Hazard Evaluation Guidelines	(C) 7/26/76 PRM 76-2		Transmits "Flood Hazard Evaluation Guidelines for Federal Executive Agencies," May 1972, for information purposes.
16	9/11/73	Waste Stabilization Ponds	(C) 1/7/81 PRM 81-1	75-3	Reinforces that stabilization ponds which receive grants must provide a minimum of secondary treatment or be upgraded accordingly.
17	5/17/73	Standardized Construction Contract Documents	(SS) 4/15/75 PG-17A		Transmits copies of standardized construction documents (advertisement, bid bond, agreement, etc.) for optional use by grantees.
17A	4/15/75	Standardized Construction Contract Documents	(C) 1/7/81 PRM 81-1	75-4	Provides optional standardized contract documents for use with construction contractors; not mandatory but grantees encouraged to use.
18	10/30/73	Reimbursement	(SP) 12/21/73 PG-22 (C) 7/26/76 PRM 76-2		Provides guidance to supplement regulations concerning processing of reimbursable projects, i.e., projects initiated between 1966 and 1972 at less than the full grant percentage.
19	11/2/73	Nonrestrictive Spectifications	(SS) 8/8/75 PG-19A		Reinforces open and free competition; two brand names "or equal" to be used in specifications; prefer use of performance specifications.
19A	8/8/75	Nonrestrictive Specifications	(C) 1/7/81 PRM 81-1	75-5	Reinforces that proprietary products may only be specified when justified; requires that if product description is used, two brands must be provided followed by the words "or equal."

PG 1973 - 1974 Continued

PG #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Redesignated PRM No.	Comments
22	12/21/73	Reimbursement	(SP) 4/17/74 PG-30 (C) 7/26/76 PRM 76-2		Based on new legislation, application cutoff date and reimbursement computation date extended; no action to be taken on projects between 1956 and 1966.
24	2/7/74	Sewer System Evaluation and Rehabilitation	(SP) 3/15/74 PG-26 (C) 1/7/81 PRM 81-1	75-7	Provides additional guidance and flexibility for a determination by the state or EPA whether excessive I/I does or does not exist.
25	3/1/74	Flood Disaster Protection Act of 1973 (Public Law 93-234)	(SP) 11/4/74 PG-25A (C) 1/7/81 PRM 81-1	75-8	Requires projects in designated flood hazard areas in which federal flood insurance is available to obtain such insurance in order to be eligible for a grant.
25A	11/4/74	Supplement to PG No. 25; Flood Disaster Protection Act of 1973 (PL 93-234)	(SS) 8/16/76 PRM 76-5 (C) 1/7/81 PRM 81-1	75-9	Supplements PG-25 allowing exemption for structures costing $10,000 or less and sewer lines or other buried structures; applicable only to Step 3 grants.
26	3/15/74	Sewer System Evaluation	(C) 7/26/76 PRM 76-2		Transmits "Guidance for Sewer System Evaluation" to assist grantees and engineers.
27	3/20/74	Best Practicable Waste Treatment Technology	(SP) 4/10/75 PG-27A		Transmits technical guidance in a document entitled "Alternative Waste Management Techniques for Best Practicable Treatment."
27A	4/10/75	Best Practicable Waste Treatment Technology	(C) 7/26/76 PRM 76-2		Revises technical requirements to achieve BPWTT particularly with regard to land application techniques.

PG 1974 Continued

PG #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Redesignated PRM No.	Comments
28	4/5/74	User Charge and Industrial Cost Recovery System	(C) 7/9/74 PG-37	75-10	Permits use of ad valorem tax base system for UC (cancelled in PG-37 on 7/9/74); ICR charges may be allocated on a systemwide basis.
30	4/17/74	Approval of Reimbursement Projects Not Previously Serviced by EPA	(C) 8/6/82 CG-82	75-11	Sets forth additional guidance for projects constructed without an EPA grant prior to 10/18/72; collection sewer projects not eligible for reimbursement grants.
33	5/10/74	Grand Funds and Project Segmenting	(C) 8/6/82 CG-82	75-14	Allows project segmenting even though segment does not result in operable project; no EPA commitment for future grant; grantee must agree to make entire project operable; grants for segments must be at 75%.
34	5/7/74	Class Deviation - Use of Force Account Work on Construction Grants Projects	(C) 1/7/81 PRM 81-1	75-15	Allows force account work on Step 1, 2 or 3 projects without dollar limitation; requires grantees to justify use by demonstrating competency and economy.
36	6/5/74	Construction of Pretreatment or Treatment Facilities for Municipal Utilities	(SP) 9/17/74 PG-36A	75-17	Treatment facilities at municipal water treatment utilities to dispose of sludge or other wastes from water treatment no longer eligible for grant after 7/1/74; earlier grants before 6/30/74 not affected by this decision.
36A	9/17/74	Eligibility of Wastewater Treatment Facilities at Municipally Owned Water Treatment Works for Construction Grants	(C) 8/6/82 CG-82	75-18	Provides additional explanation of why waste treatment projects at municipal water treatment utilities are not eligible for construction grants under PL 92-500.

PG 1974 Continued

PG #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Redesignated PRM No.	Comments
37	7/9/74	Cancelling PG-28, User Charges and Industrial Cost Recovery System	(SP) 7/16/76 PG-38 (C) 1/7/81 PRM 81-1	75-19	Reverses earlier decision to allow UC system based on ad valorem taxes (see PG-25, 4/5/74); ICR provisions unchanged.
38	7/16/74	User Charge Systems	(C) 1/7/81 PRM 31-1	75-20	Pending projects are to be advised ad valorem tax based user charge system is not acceptable; existing grant projects to be advised that ad valorem based user charge system must be changed or grant may be withdrawn.
40	9/24/74	Obligations and Payments for Construction Grant Reimbursement Projects	(C) 7/26/76 PRM 76-2		This PG and those which supplement it (40A, B, C and D) primarily discusses internal procedures, schedules, payments and contact with states and grant applicants concerning obligations and grants for reimbursable projects using $1.9 billion appropriated under section 206(a) PL 92-500. However, other items concerning eligibility are also discussed. All five PG's should be read as a group. First round payments to be made based on 50% of applicant's claim for those applicants which had received a previous grant; older "woodwork" projects which had not received a grant to be processed secondly; internally establishes cutoff date of 11/30/74 for submission of information and documentation from applicant to be eligible for a grant.

PG 1974 Continued

PG #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Redesignated PRM No.	Comments
40A	10/18/74	Obligations and Payments for Construction Grant Reimbursement Projects	(C) 7/26/76 PRM 76-2		Cutoff date for submission of documentation by applicants extended to 12/31/74; includes forms to be completed noting percentage of construction completed as of 1/31/74.
40B	11/13/74	Construction Grants Reimbursement Projects Eligible Costs, Printouts, Corrections to PG-40A	(C) 7/26/76 PRM 76-2		Reimbursable eligible costs are for construction completed as of 1/31/74; total grant entitlement (subtracting existing grants made before 1/31/74 limited to 50% or 55%; reiterates guidance stated in PG-22 (12/21/73); eligible work completed after 1/31/74 is not acceptable for computing reimbursement with current $1.9 billion appropriation; total federal assistance from all sources (Farmers Home Administration, Economic Development Administration, etc.) may not exceed 80% of eligible project costs; cutoff date for submission of documentation by applicants on "woodwork" projects extended to 1/31/75.
40C	12/4/74	Obligations and Payments for Construction Grant Reimbursement Projects	(C) 7/26/76 PRM 76-2		Concerns review and confirmation by regional offices of computer printout sheets produced by headquarters; advises that cutoff date of 1/31/75 was published in FR on 11/21/74 (p. 40855).
40D	2/28/75	Second Round Reimbursements	(C) 7/26/76 PRM 76-2		Based on the number of projects (4222) and the amount of funds appropriated for reimbursement ($1.9 billion) in the final EPA grant, percentage for each project is 68.709%; first round reimbursements were limited to 50% of eligible project costs for construction completed by 1/31/74; reimbursement grants may now be increased (in some cases, decreased) to 68.709%.

PG 1974 - 1975 Continued

PG #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Redesignated PRM No.	Comments
42	10/23/74	Engineering Services for Wastewater Treatment Facilities, Revision of Fee Structure	(SS) 7/8/75 PG-53 (C) 7/26/76 PRM 76-2		Prohibits engineering contracts based on "percentage of construction costs" and suggests other acceptable types of contracts; transmits Attachment O to OMB's Circular A-102 and indicates that these procedures should be followed.
43	11/13/74	Policy Re Retention of Payments	(C) 1/7/81 PRM 81-1	75-22	Emphasizes need to make prompt payments to construction contractors and provides 10% retainage until 50% project completion; thereafter reduced to 5% and lower after project substantially complete; may be applied retroactively.
44	12/9/74	Escalation Clauses in Construction Grants Projects	(C) 1/7/81 PRM 81-1	75-23	Restates that escalation of cost clauses are not authorized for construction grants projects.
45	12/11/74	Use of Value Engineering in the EPA Construction Grants Program	(SS) 1/20/76 PG-63		VE is grant eligible when approved in advance; redesign resulting from VE is grant eligible when approved in advance; A/E contracts requiring redesign may be renegotiated from percentage-of-construction type contracts.
47	3/11/75	Relationship Between 201 and 208 Planning	(SS) 2/9/76 PG-66		Establishes coordination procedures between facilities planning and areawide wastewater treatment management plans while both are in the process of development.
49	N/A	Eligibility of Land Acquisition Costs for Land Treatment Processes	(SP) 4/2/76 PG-67 (SP) 12/15/76 PRM 77-5 (C) 8/6/82 CG-82	75-25	Guidance on determination of land eligibility (and ineligibility) for land treatment (effluent not sludge) systems.

PG 1975 Continued

PG #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Redesignated PRM No.	Comments
50	6/6/75	Consideration of Secondary Environmental Effects in the Construction Grants Process	(SP) 3/81 FP-81 (C) 8/6/82 CG-82	75-26	Provides guidance on the evaluation of secondary (growth enducing) environmental effects of projects in order to assure uniform national application.
51	6/25/75	Questionnaire for Review of Facilitiy Plans	(C) 7/26/76 PRM 76-2		Transmits a sample facilities plan review checklist to be used as guidance.
52	7/2/75	Field Survey to Identify Cultural Resources Affected by EPA Construction Grants Projects	(SP) 3/81 FP-81 (C) 8/6/82 CG-82	75-27	Provides guidance on the conduct of field surveys to identify cultural resources; indicates eligibility of survey costs to be made on a case-by-case basis and reasonableness.
53	7/8/75	Interim Guidance - Consulting Engineering Agreements - Title II Construction Grants Program	(C) 7/26/76 PRM 76-2		Provides interim guidance based on proposed regulations dated 5/9/75 and concerns A/E contracts and clauses for inclusion in agreements.
54	7/8/75	Flood Insurance Requirements Effective July 1, 1975	(SS) 8/16/76 PRM 76-5 (C) 1/7/81 PRM 81-1	75-28	If designated as a flood-prone community, grantee must be participating in the flood insurance program to be eligible for grant.
56	8/5/75	EPA Procedures in Initiating Debarment Actions Against Grantee Contractors	(C) 8/6/82 CG-82	75-29	Lists four conditions for initiating debarment proceedings.
57	9/8/75	Cost Control	(C) 8/6/82 CG-82	75-30	Reemphasizes that projects are to be cost effective and provides guidance for evaluating projects including "gold plating" and value engineering.

PG 1975 Continued

PG #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Redesignated PRM No.	Comments
58	9/ /75	Facilitating EIS Preparation with Joint EIS/ Assessments (Piggybacking)	(SP) 3/81 FP-81 (C) 8/6/82 CG-82	75-31	Provides procedures and guidance for the early identification of projects which may require the preparation of an environmental impact statement and procedures for conducting a joint EIS/environmental assessment statement where an acceptable consultant is hired by grantee.
59	2/11/76	Compliance with Title VI in the Construction Grants Program	(SP) 3/81 FP-81 (C) 8/6/82 CG-82	75-32	Requires grantee to comply with the Civil Rights Act; discrimination in providing sewer service is not to be practiced.
60	8/11/75	Discount Rate	(C) 1/7/81 PRM 81-1	75-33	Revised discount rate 6-1/8% effective for all new facilities planning starts.
61	12/16/75	Grants for Treatment and Control of Combined Sewer Overflows and Stormwater Discharges	(SP) 12/3/76 PRM 77-4 (SP) 3/81 FP-81 (C) 1/7/81 PRM 81-1	75-34	Combined sewer projects must demonstrate that they are cost effective compared with other alternatives; stormwater projects generally not fundable except under unusual circumstances; multipurpose projects to be proportioned and grant based on pollution control portion only.
62	12/29/75	Allowable Costs for Construction of Treatment Works That Jointly Serve Municipalities and Federal Facilities	(C) 8/6/82 CG-82	75-35	Federal facilities required to pay their proportional share of design (after 12/29/75) and construction except if federal contribution is 25,000 gallons/day or less or 5% or less of the total design flow.

PG 1976 Continued

PG #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Redesignated PRM No.	Comments
63	1/20/76	Value Engineering in the EPA Construction Grants Program	(C) 8/6/82 CG-82	75-36	VE mandatory for all Step 2 projects after 7/11/76 with total estimated costs of $10 million or greater; encouraged on other projects; redesign costs to implement VE recommendations eligible for grant; VE training costs may be eligible.
64	2/5/76	Allowability/Eligibility of Miscellaneous Costs	(C) 7/26/76 PRM 76-2		Provides detailed guidance on allowability of costs applicable to both earlier (PL 84-660) and later (PL 92-500) projects; lists 35 specific examples (indirect, direct, studies, reports, etc.).
65	5/17/76	User Charge System: Plan and Schedule	(C) 8/6/82 CG-82	75-37	Emphasizes that grantees are to submit with a Step 2 application a realistic and detailed plan and schedule for the development and implementation of a user charge system during Step 3 construction.
66	2/9/76	Relationship Between 201 Facility Planning and Water Quality Management (WQM) Planning	(SP) 3/81 FP-81 (C) 8/6/82 CG-82	75-38	Provides guidance for coordination between the two planning efforts (facilities planning and WQM planning) in order to assure conformity and preclude delays.
67	4/2/76	Eligibility of Land Acquisition Costs for the Ultimate Disposal of Residues from Wastewater Treatment Processes	(SP) 12/15/76 PRM 77-5 (C) 8/6/82 CG-82	75-39	Provides detailed guidance concerning the eligibility of land for disposal of residues (sludge, grit, ashes) including costs which are not allowable.

PROGRAM REQUIREMENTS MEMORANDA (PRM) 1976-1981

PRM #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Comments
76-1	7/26/76	Construction Grants Program Issuances	(C) 1/7/81 PRM 81-1	Initiates and explains new PRM and POM system and provides conversion from earlier PG and CG systems.
76-2	7/26/76	Cancellation of Certain Program Guidance Memoranda (PGM)	(C) 1/7/81 PRM 81-1	Lists cancelled PG's and where appropriate reason for cancellation; renumbers and cross references remaining PG's as PRM's all beginning PRM 75-1, -2...
76-3	8/16/76	Presentation of Local Government Costs of Wastewater Treatment Works in Facility Plans	(SP) 6/21/77 PRM 77-8 (SP) 3/81 FP-81	Requires full public disclosure of all project costs and annual or monthly costs to users.
76-4	10/14/76	Coordination of Construction Grants Program with EPA-Corps of Engineers Section 404/Section 10 Permit Programs	(SP) 3/81 FP-81 (C) 1/7/81 PRM 81-1	Grantees with projects impacting wetlands or navigable waters should consult with the Corps of Engineers concerning permits.
76-5	8/16/76	Flood Insurance Requirements	(SP) 3/81 FP-81 (C) 8/6/82 CG-82	Requires Step 3 grantees to participate in flood insurance program where applicable in order to be eligible for grant; supersedes PG's 25, 25A and 54.
77-1	11/23/76	Treatment Works for Recreational Parks, Industrial Parks and Institutions		Municipal treatment works are to have priority over projects solely for recreation and industrial parks and institutions; if new, parks not eligible; if existing, possibly eligible.
77-2	11/29/76	Grants Eligibility of Start-up Services	(C) 8/6/82 CG-82	Generally treatment plant start-up services are eligible for grant participation; includes limitation of services and also discusses retroactive application.

PRM 1977 Continued

PRM #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Comments
77-3	11/29/76	Plan of Operation for Municipal Wastewater Treatment Facilities	(C) 8/6/82 CG-82	Guidance for preparing a plan of operation; preliminary plan of operation should accompany plans and specifications at the conclusion of Step 2 projects; includes sample plan of operation and other considerations.
77-4	12/3/76	Cost Allocations for Multiple Purpose Projects	(SP) 3/81 FP-81	Provides rationale and mathematical equations for proportioning costs on projects with multiple purposes (e.g., treatment/flooding/drainage/solid waste disposal, etc.); supplements PG-61.
77-5	12/15/76	Grant Eligibility of Land Acquisition by Leaseholds or Easements for Use in Land Treatment and Ultimate Disposal of Residues	(SP) 2/17/78 PRM 78-4 (C) 8/6/82 CG-82	Costs of leasing land or of obtaining an easement on land for land treatment processes or ultimate disposal of sludge are grant eligible if several conditions are satisfied; supplements PG-49 and PC-67.
77-6	5/4/77	Easements	(C) 5/30/80 PRM 80-3 (C) 1/7/81 PRM 81-1	All new Step 2 work hereafter shall include preliminary easement-related work to avoid future delays; however, grantees not to purchase eligible land before Step 3 award.
77-8	6/21/77	Funding of Sewage Collection System Projects	(SS) 3/8/79 PRM 78-9	Provides guidance on eligibility of sewers with regard to date of substantial habitation (10/18/72); density criteria; evaluation of other alternatives; requires additional work during facilities planning; parts effective immediately and may be retroactive to projects which have not received approval of facilities plans.

PRM 1978 Continued

PRM #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Comments
78-1	12/29/77	Erosion and Sediment Control in the Construction Grants Program	(C) 8/6/82 CG-82	Provides guidelines and general principles for erosion and sediment control to be used in project planning, design and construction; may be applied retroactively.
78-2	1/26/78	Discount Rate	(C) 1/7/81 PRM 81-1	Revised discount rate 6-5/8% effective 10/1/77; to be used in new facilities plans.
78-3	2/17/78	Buy American	(SS) 7/9/80 PRM 80-5 (C) 1/7/81 PRM 81-1	Step 3 projects must include "Buy American" provisions (preference to domestic construction materials) in construction contracts.
78-4	2/17/78	Grant Eligibility of Land Acquired for Storage in Land Treatment Systems	(C) 8/6/82 CG-82	Land acquired (not lease nor easement) for storage after 12/27/77 is eligible for grant participation; supplements PG-49, PG-67, and PRM 77-5.
78-6	2/17/78	Industrial Cost Recovery - Guidance	(C) 1/7/81 PRM 81-1	Implements the ICR moratorium concerning repayment of federal share of recovered ICR funds; exempts users of 25,000 gal/day from ICR; releases withheld grant payments based on noncompliance with ICR provisions; grantees may collect ICR payments and must continue to develop ICR system.
78-7	2/17/78	Combined Step 2 and Step 3 Construction Grant Awards (Step 2+3)	(C) 1/7/81 PRM 81-1	Allows combined Step 2+3 grants for communities with population of 25,000 or less and project costs $2 million ($3 million in high cost states) or less.

PRM 1978 - 1979 Continued

PRM #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Comments
78-8	2/13/78	Rejection of All Bids: Guidance for EPA Concurrence Functions	(C) 8/6/82 CG-82	All bids may be rejected only with good cause and EPA concurrence; grant may be limited to federal share of lowest bid if resolicitation is undertaken.
78-9	3/8/78	Funding of Sewage Collection System Projects	(SP) 3/81 FP-81	Provides guidance on eligibility of sewers with regard to date of substantial habitation (10/18/72); removes density criteria from eligibility determination but allows density criteria for evaluation of alternatives to conventional sewers; requires conventional sewers to be justified based on public health, groundwater pollution or point source pollution; applicable to all projects containing collection systems.
78-10	3/17/81	Infiltration/Inflow Program Guidance	(SP) 3/81 FP-81	Optional simplified procedures for I/I determination; less than 1500 gallons/in. diameter/day considered nonexcessive infiltration.
78-11	5/11/78	Toxicity of Chemical Grout for Sewer Rehabilitation	(C) 8/6/82 CG-82	Notice of alert that a certain grout used in rehabilitating sewers may be toxic and exposure by workers should be completely avoided.
78-12	6/12/78	Preconstruction Lag Management	(SP) 5/30/80 PRM 80-3 (C) 8/6/82 CG-82	Strengthens procedures to avoid construction delays and sets conditions for terminating grant.
79-1	10/23/78	Safety Requirements for the Design and Operation of Chlorination Facilities Using Gaseous Chlorine	(C) 8/6/82 CG-82	Sets forth good engineering practices for safety in design and operation of chlorination facilities; applicable to all new grants and where practicable on existing grants.

PRM 1979 Continued

PRM #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Comments
79-2	11/13/78	Royalties for Use of or for Rights in Patents	(C) 8/6/82 CG-82	Royalties to be avoided where possible but if justified are allowable for grant participation; procedures and criteria for justification are set forth in this PRM.
79-3	11/15/78	Revision of Agency Guidance for Evaluation of Land Treatment Alternatives Employing Surface Application	(SP) 3/81 FP-81	Land treatment must be given very serious consideration during facilities planning; three systems must be evaluated; applicable to new facilities plans and those not presently approved; emphasizes agency's commitment to land treatment; pretreatment prior to land application to comply with EPA design manual or possibly unallowable for grant.
79-4	11/17/78	Discount Rate	(C) 1/7/78 PRM 81-1	Revised discount rate 6-7/8% effective 10/1/78; to be used on new facilities plans.
79-5	12/28/78	Construction Incentive Program	(C) 8/6/82 CG-82	Incorporates a voluntary construction incentive clause in Step 3 projects; provides formula for computing financial reward for realized savings; applicable to projects with Step 3 eligible cost of more than $10 million.
79-7	3/9/79	Grant Funding of Projects Requiring Treatment More Stringent than Secondary	(SP) 9/5/79 PRM 79-11	Projects providing greater than secondary treatment are to be justified and receive special review at EPA regions (less than $1 million) or EPA headquarters (more than $1 million).
79-8	5/9/79	Small Wastewater Systems	(SP) 3/81 FP-81	Sets forth agency policy for funding privately and publicly owned small systems; guidelines for expensive projects; coordination with FmHA; lists other eligible and ineligible costs for small systems.

PRM 1979 - 1980 Continued

PRM #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Comments
79-10	7/12/79	Qualifications of Major Items of Equipment	(C) 8/6/82 CG-82	Sets forth procedures for prequalifying equipment without restricting free and open competition.
79-11	9/5/79	Funding of Waste Load Allocations and Water Quality Analysis for POTW Decisions	(C) 8/6/82 CG-82	Grant funds may be used to conduct waste load allocation studies where treatment more stringent than secondary is proposed; requires EPA and state approval.
80-1	11/26/79	Discount Rate	(C) 1/7/81 PRM 81-1	Revised discount rate 7-1/8% effective 10/1/79; to be used on new facilities plans.
80-2	12/20/79	Step 2 and Step 3 Architect/Engineer Level of Effort Study		Announcement of a study to help determine reasonableness of A/E design and inspection costs for grant assisted projects; distributes publication from EPA Dallas regional office concerning level of A/E effort for design and inspection services.
80-3	5/30/80	Management Reforms to Reduce the Time Interval Between Step 3 Grant Award and Initiation of Construction	(C) 8/6/82 CG-82	Sets forth policies and procedures to reduce the time delay between Step 3 grant award and initiation of construction for four problem areas, namely, acquisition of real property (including easements), local funding requirements, service agreements (intermunicipal) and cultural resource investigations.
80-4	7/17/80	Implementation of Women's Business Enterprise Support Program	(SP) 8/29/80 PRM 80-7 (C) 8/6/82 CG-82	Establishes a 2% national goal for participation by women-owned firms in the Construction Grants Program; reasonable WBE liaison services allowable for grant participation.

PRM 1980 - 1981 Continued

PRM #	Dated	Title	Date Cancelled (C) Superseded (SS) Supplemented (SP)	Comments
80-5	7/9/80	Buy American	(C) 8/6/82 CG-82	Sets forth a three-step procedure for evaluating the application of the Buy American provisions; discusses the 50% rule and 6% price preference.
80-6	7/21/80	Retroactive Application of Program Requirements	(C) 1/7/81 PRM 81-1	States agency policy on retroactive application of requirements; in general new requirements do not apply to Step 3 projects under construction or likely to be under construction in six months; new requirements will only apply to existing projects, where necessary to implememt new laws or correct serious program deficiencies.
80-7	8/29/80	Grant Eligibility of Minority Business Enterprise and Women's Business Enterprise Liaison Services	(C) 8/6/82 CG-82	States policy under which MBE and WBE liaison services are eligible for grant participation.
81-1	1/7/81	Issuance of Program Requirement Memorandum		Cancels many previous PRM's; identifies those to be cancelled upon publication of *Facilities Planning 1981* (FP-81).
81-2	11/19/80	Discount Rate	(C) 8/6/82 CG-82	Revised discount rate 7-1/8% effective for all new facilities plans started 60 days after date of PRM, i.e., 1/19/81.

Subject	First Edition 7/1/75	TM No. 76-1* 8/19/76	TM No. 77-1 1/10/77	TM No. 78-1 2/17/78	Second Edition 10/1/79
Indirect Costs	✓				✓
Travel Costs	✓				✓
Bond Costs	✓				✓
Liquidated Damages	✓				✓
Bid Bond Forfeiture	✓	✓			✓
Rate Studies	✓				✓
Financial Reports and Studies	✓				✓
Establishment of Special Assessment Districts	✓			✓	✓
Public Liaison Services	✓				✓
Assistance with State and Federal Regulations	✓				✓
Public Participation On-Site Visits					✓
Cost of Grantee Training Workshops					✓
Redesign/Replanning Costs Resulting from Changes in Federal Requirements	✓				✓
Field Surveys to Identify Cultural Resources	✓				✓
Industrial Planning	✓				✓
Facilities Serving Communities and Federal Facilities	✓				✓
Site Acquisition vs. Site Preparation Costs	✓	✓	✓		✓
Certificate as to Title to Project Site	✓				✓
Acquisition of Privately or Publicly Constructed Waste Treatment Facilities	✓				✓
Demolition of Existing Structures	✓				✓
Utilities	✓				✓

HANDBOOK Continued

Subject	First Edition 7/1/75	TM No. 76-1* 8/19/76	TM No. 77-1 1/10/77	TM No. 78-1 2/17/78	Second Edition 10/1/79
Restoration of Streets and Rights-of-Way	✓				✓
Mobile Equipment	✓				✓
Office Equipment and Furnishings	✓				✓
Shop Furnishings	✓				✓
Laboratory Equipment and Supplies	✓				✓
Safety Equipment	✓				✓
Tools	✓				✓
Replacement Parts	✓			✓	✓
Collection System Maintenance Equipment	✓				✓
Project Inspection	✓				✓
Groundwater Monitoring Facilities	✓				✓
Biological "Seeding"	✓				✓
Service Charges	✓				✓
Fringe Benefits	✓				✓
Labor Charges and Related Costs	✓				✓
Start-up Services	✓				✓
Pretreatment Program			✓		✓
Individual Systems					✓
Royalties and Patents					✓
Crossover Sewers					✓
Costs of Implementing the Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970	✓				No Opinion

* TM 76-1 contains a revision to the general "Allowability Determinations" and reads, "The cost items listed below are applicable to both PL 84-660 and PL 92-500 projects. In making eligibility determinations, consideration should be given to commitments previously made to grantees in the absence of prior National policy, pertinent statutes or regulations."

AUDIT RESOLUTION BOARD DECISIONS (ARB) 1980-1982

ARB Decision Number	Dated *	Title	Comments
1	2/21/80	Allowable Base for Determining Design Fees as a Percentage of Construction Cost	Limits the base for computing design fees on grants awarded under Subpart E to the low, responsive, responsible bid for construction plus (or minus) the cost of change orders approved before 12/17/75 where construction was initiated prior to that date; not applicable if final payment was made before 12/17/75.
1A	1/19/81	Applicability of Paragraph B5 of Appendix D to both PL 84-660 and PL 92-500 Projects (Clarification of Decision on ARB-1)	Concludes that the policies and procedures contained in Appendix D to 40 CFR Part 35 Subpart E entitled "EPA Transition Policy - Existing Consultation Engineering Agreements" is equally applicable to grants awarded under PL 92-500 and Section 8 of Public Law 84-660.
2	2/21/80	Allowability of Bond Costs Claimed Under PL 92-500	Bond costs (other than interest) such as expenses to prepare the prospectus, printing, advertising, issuing, etc. are allowable project costs on Step 3 grants awarded on or before 2/5/76; bond costs under PL 92-500 grants awarded after 2/5/76 are not eligible for grant participation.
3	2/21/80	Unaudited Costs Allowed to Match Costs Questioned in Final Audit Report	Additional costs may be claimed by grantee after final audit; however, the additional costs not considered in determining allowable costs until the additional costs are subjected to audit.
4	1/19/81	Unsupported Service Charges	Service charges (as used here, refer to a predetermined percent of actual direct nonsalary items such as special consultants, printing, communication, travel) are allowable for grant participation only if supported by accounting records; many times, a separate pool for these costs is not maintained and they are additionally invoiced as part of the overhead (duplicate billing).

* Effective immediately on all cases for which EPA has not yet rendered a final determination.

ARB 1980 - 1982 Continued

ARB Decision Number	Dated *	Title	Comments
5	N/A	N/A	Under further study.
6	1/19/81	Clarification of Construction Grants Regulation 40 CFR 35.925-18 ("Limitation upon project costs incurred prior to award")	Planning and design costs falling within the transition provisions of 40 CFR 35.925-18(a)(2) and (a)(3) may be reimbursed under the next awarded grant regardless of step, i.e., it is not necessary to award individual PL 92-500 Step 1 and Step 2 grants.
7	N/A	N/A	Resolved without issuance of ARB decision.
8	11/3/81	Allowability of Unsupported Grantee Claims	Reinforces the necessity by the grantee of maintaining records which fully disclose the amount and disposition of grant funds and facilitate an effective audit in order for costs to be allowable for grant participation.
9	11/3/81	Improper Renegotiated Engineering Subagreement Costs - Interim Audit Report No. P2bw9-01-0019-91234	Grantee renegotiated a pre-existing percentage-of-construction-cost contract into a fixed-price contract without adequate negotiation and cost review; therefore, costs allowable for grant participation are limited to incurred costs plus the dollar profit specified in the contract.
10	3/11/82	Effect of a Region's Prior Approval of Construction Grant Specifications Upon the Agency's Ability to Disallow Unreasonable Costs	Unreasonable costs (in the instant case, aesthetic features) are not allowed for grant funding; EPA's review and approval of plans and specifications does not absolve the grantee of its responsibility to properly design and construct the project nor make unallowable costs allowable; in the instant case, the ARB found for the grantee.

* Effective immediately on all cases for which EPA has not yet rendered a final determination.

ARB 1980 - 1982 Continued

ARB Decision Number	Dated *	Title	Comments
11	3/11/82**	Allowability of Undocumented Overtime Charges	Engineer used a cost-multiplier type contract but credited professional employees with compensatory time in lieu of overtime pay; engineer's records could not substantiate that employees used compensatory time and therefore costs are not allowable for grant participation; reinforces documentation and record requirements of ARB decision #4.
12	N/A	N/A	Resolved without issuance of ARB decision.

* Effective immediately on all cases for which EPA has not yet rendered a final determination.

** Effective for all grants awarded prior to issuance of the *Handbook of Procedures*.

APPENDIX A

BOARD OF ASSISTANCE APPEALS DECISIONS

SUBJECT INDEX AND CHRONOLOGICAL LISTING

D R A F T

Assistance Appeals Subject Index*

Current as of January 13, 1984

Allowability of Costs for Grant Funding

Accounting Method

76-16† 79-08† 79-34† 80-73

Allocation

78-04† 79-09' 79-18††† 79-29† 79-43††† 80-01†
80-13††† 80-18 80-26 80-31† 80-56 80-60
80-61 80-64 80-69 80-85† 81-03† 81-57†

Direct Costs

79-04 79-09† 79-29† 80-01† 80-09 80-12
80-17 80-25 80-28† 80-57 80-65 80-70
80-81 80-102 81-17 81-18 81-58 81-71†
81-89 81-92† 82-12 82-122†

Documentation

76-16† 77-06† 77-22† 79-09† 79-29† 79-36†
79-43 80-22† 80-28† 80-29 80-41 80-51†
80-54† 80-64 80-72 80-77 80-81† 80-97†
80-101† 80-114 81-02† 81-03† 81-42† 81-47
81-62† 81-63 81-72 81-73 81-77† 81-79†
81-84† 81-89 81-92† 81-93 81-97 81-98†
81-102 81-112† 81-113 82-10† 82-12† 82-15
82-19† 82-20† 82-29† 82-37† 82-44† 82-48†
82-53† 82-90 82-93† 82-97† 82-113† 82-119†
82-122†

Federal Cost Principles

75-23† 80-13† 80-54† 80-76† 80-83† 81-89†

Force Account

79-18† †† 80-09 80-10 80-13† †† 80-36 80-49
80-55 80-57 80-64 80-94 80-101† 80-113†
81-06† 81-31 81-43† 81-74 81-77 81-86
81-99† 81-109 82-44† 82-54†

---

* Key: Pending appeals are designated by docket numbers without symbols. Decisions and other determinations of the Board of Assistance Appeals are designated by docket numbers with the following symbols:

† Decided Appeal
†† Ruling on Procedural/Jurisdictional Motion or Order
††† Reconsidered Appeal

Fringe Benefits

77-22† 79-08† 79-09† 79-34† 80-54† 80-85†
80-113† 81-21† 81-79† 82-15

Incurred After Completion Date

79-43† 79-43†† 80-54† 80-62 80-94 80-101†
80-109† 81-23† †† 81-26 81-54† 81-57† 81-89†
81-107† 81-109† 82-06 82-77† 83-33†

Incurred Before Grant Award

75-17† 75-36† 76-01† 79-08† 79-10† 79-43†††
80-39† 80-62 80-113† 81-20 81-78† 81-79

Indirect Costs

General Municipal Administrative Expenses

78-17† 79-08† 79-43† 80-51† 80-54† 80-79†
80-80† 80-85† 80-106† 81-03† 81-23 81-35†
81-36† 81-67 81-84† 81-89† 82-32† 82-37††
82-53† 82-97† 82-103

Generally

78-12 79-04 80-26 80-27 80-30 80-65
80-113† 81-03 81-06† 81-08 81-38 81-40
81-43† 81-89† 82-11 82-12 82-94

Indirect Cost Rate

80-70 80-80† 81-03† 81-36† 81-76 81-107
82-64

Interest Against the Government

80-50† 80-54† 81-37† 81-42† 82-06† 82-133†

Outside Scope of the Project

77-13† 80-51† 80-79† 80-80† 81-54 81-89†
81-99† 81-115† 82-17†

Overhead

80-07† 80-17 80-52† 80-81 81-03† 81-21†
81-97

Profit

80-07† 80-30 80-65 80-81 81-21† 81-36†
81-49† 82-93†

Reasonableness

79-18† †† 79-36† 79-43† 80-01† 80-07† 80-13† ††
80-23† 80-39† 80-52† 80-54† 80-63† 80-76†
80-97† 81-02† 81-03† 81-49† 81-77† 81-89†
81-98† 82-23† 82-119† 83-19†

Audits

Access to Records

78-06†

Record Retention

77-06† 78-06† 79-15† 79-18† 79-29† 79-36†
80-01† 80-13† 80-22† 80-23† 80-28† 80-54†
80-97† 81-03† 81-38† 81-62† 81-77† 81-81
81-89† 81-92† 81-98† 82-20† 82-46

Board of Assistance Appeals

Burden of Proof

75-16† 75-38† 76-20† 77-21† 78-14†† 78-15††
78-19†† 78-20†† 79-09† 79-18† 79-25† 79-36†
80-01† 80-07† 80-13† 80-18†† 80-22† 80-23†
80-26†† 80-39 80-52† 80-54† 80-55†† 80-56††
80-60†† 80-61†† 80-64†† 80-69†† 80-80† 80-85†
80-116† 81-02† 81-21† 81-23††† 81-35† 81-36†
81-98† 81-107† 82-19† 82-24† 82-26†† 82-53†
82-105† 83-33†

Cost of Appeal

80-54† 80-80† 80-97† 81-36†

Issues on Appeal

80-28† 81-79† 81-89†

Jurisdiction

Bid Protests

75-37† 79-42† 82-03

Deviations from Regulations

77-13† 78-01† 79-48†† 80-22† 80-40†
80-79† 80-110†† 81-54† 81-77† 82-110†

Equitable Powers

75-07† 79-49† 80-22† 81-77† 82-03† 82-26††

Final Disputes Decision

77-21† 77-21†† 79-18† †† 79-48†† 80-13† †† 80-53
80-79† 80-85† 80-97† 80-113† 81-36† 81-89†
81-103† 81-108† 81-79† 81-96† 82-02 82-16†
82-60 83-106†† 83-126†† 83-132†† 83-137††

Generally

79-48†† 79-49† 80-01† 80-18†† 80-22† 80-26††
80-55†† 80-56†† 80-60†† 80-61†† 80-64†† 80-69††
80-80† 80-105 80-113† 81-33† 81-79† 81-96†
82-26††

Notice of Appeal

78-01† 78-23†† 79-18† 79-25† 80-13†

Parties to Appeal

79-38†† 80-80† 80-103††

Reconsideration

74-08††† 74-09††† 75-05††† 75-06††† 79-36††† 80-18††
80-26†† 80-39†† 80-55†† 80-56†† 80-60†† 80-61††
80-64†† 80-69†† 81-23††† 81-33††† 82-37† 82-57††

Standard of Review

79-49† 80-01† 80-39† 81-57† 81-115† 82-26††
82-30†

Procedures

Deadlines

74-13†† 76-21††

Dismissal

74-13†† 81-80†

Generally

80-85†† 80-110†† 81-6† 82-23†

Panel Appointment

80-89†† 80-98

Clean Air Act

77-06† 78-06† 79-09† 79-29† 80-28† 80-77† 81-38†
81-62† 81-79†

Clean Water Act

Wastewater Treatment Works Construction Grants

Abandonment of Treatment Works

81-02†

Acquisitions

Land

76-01†	77-20†	80-01†	80-31†	80-38
80-54†	80-85†	80-97†	81-02†	81-42†
81-55	81-67	81-68	82-19†	82-23

Treatment Works

74-08†	74-08††	74-09†	74-09††	75-05†
75-05††	75-06†	75-06††	76-01†	76-18†
78-26†	81-19†	81-119†††		

Additions to Treatment Works

75-01†	75-25†	78-26†	80-76†	80-117	81-35†
81-58†	82-24†	82-66			

Advanced Wastewater Treatment

78-07 81-96†

Alternative Technology

Applicable Regulations

81-62† 82-110†

Architect/Engineering Services

79-10†	79-15†	79-18† ††	79-33†	79-43†	79-47†
80-01†	80-04	80-07	80-13† ††	80-14	80-22
80-38	80-39†	80-52†	80-63	80-64	80-72
80-79	80-80	80-85†	80-89	80-94	80-104
80-110	81-05	81-06†	81-20	81-21†	81-22†
81-31	81-32	81-36†	81-43†	81-49†	81-58
81-77†	81-80	81-97†	81-98†	82-17†	82-20†
82-37†	82-49	82-53†	82-57†	82-77	82-80
82-90	82-94†	82-97†	82-113†	83-33†	

Bond Costs

74-13	79-36†††	80-01	80-09	80-54†	81-32
81-86	82-19†				

Collectors and Interceptors

74-12† 75-09† 75-10† 75-11† 75-12† 75-13†
75-14† 75-15† 75-16† 75-17† 75-21† 75-39†
76-20 77-02 77-17 77-18† 78-12 79-25†
79-49† 80-22† 80-105 81-04 81-98† 82-55†
83-06†

Cost Effectiveness

75-01† 75-05† 79-33† 79-43† 80-22 81-02†
81-19†

Crossover Sewers

77-09 80-54

Duplicative Costs

77-22† 79-38 79-33† 79-34† 80-07†
80-54† 81-02† 81-58 82-19† 82-105†

Eligibility of Applicant

75-07† 78-26†

Industrial Cost Recovery

79-49†

Industrial Sources

75-30† 79-49† 81-99

Initiation of Construction

74-07 75-38† 77-15† 78-26† 81-114†

Innovative Technology

82-110†

Landscaping

81-32 81-34 81-101

Legal Fees

Claim Defense

82-26††

Equal Access to Justice Act
80-80†

Generally

79-36†	80-01	80-04	80-54†	80-80†	80-97†
80-104	81-32	81-36†	81-42†	81-95	81-98†
82-05	82-53†	82-77	82-80	82-119†	

Municipality
75-03†

Operation/Maintenance

79-38	80-26	81-21†	81-89†	81-112†	82-17†
82-103					

Plans and Specifications

80-04	80-63†	80-64	80-80†	81-94	

Pollution Control Need

75-11†	80-22†	81-50	81-66	81-69	82-17
82-24†					

Project Inspection

78-06	79-36†	80-01†	80-26	80-109	81-06†
81-23†	81-26	81-32	81-43†	81-44	81-89†
81-98†	81-107†	81-109†	82-20†	82-57†	82-77†
82-113	83-33†				

Redesign Costs

79-43†	80-38	80-80†	81-33†	82-94†	

Regionalization

74-08††	74-09††	75-05†	76-17	77-19	78-08
78-14	78-15	78-19	78-20	81-84†	

Reimbursement for Pre-Award Costs

74-07	74-13	75-25†	76-18†	77-15†	80-39†

Replacement of Treatment Works

77-02†	79-38†	79-49†	82-110†

Sewer Use Ordinance
80-54† 80-79† 81-112†

States

Approval
75-1† 82-66

Certification
81-54†

Delegation to State Agencies
75-03† 80-79† 81-54† 82-17† 82-118†
83-126† 83-137††

Priority List
81-19†

Street Repair
77-21† 81-47 81-115 83-137††

User Charge System
76-04† 80-95 80-116†

Estoppel

74-07	75-25†	75-37†	78-23††	79-12†	79-18††
79-34†	79-36†	79-47†	79-49†	80-07†	80-13††
80-22†	80-50†	80-52†	80-54†	80-81†	80-97†
81-03†	81-33†	81-37†	81-50	81-54†	81-56
81-62†	81-69†	81-77†	81-89†	81-98†	81-112†
81-114†	82-06†	82-19†	82-26††	82-133†	

Grant Administration

Amendments
77-13† 80-03† 80-116† 81-69† 81-114†

Annulment

Breach
81-16† 81-114†

Characterization

Contract
76-02† 80-105† 81-114†

Cooperative Agreement

Trust
79-18† 80-13† 80-23† 82-53†

Conditions
81-16† 81-58

De-Obligation of Grant Funds
81-105

Matching Funds
81-16† 81-65

Project Changes

Generally
77-13† 79-43† 80-03† 80-54† 80-105† 81-22†
81-23††† 81-54† 81-107† 82-23†

Grant Amount

Decrease
81-103†

Increase
78-17† 79-36† 80-79† 80-116 81-23†††
81-54 81-107† 81-112† 82-66 82-119†

Prior Approval
79-10† 79-18† †† 79-36† 80-13† †† 80-79† 81-98†
81-99† 82-26†† 82-66

Schedule

Recoupment of Grant Funds
76-02† 78-06† 79-12† 79-18† 80-01† 80-13†
80-28† 80-97† 81-03† 81-45 81-56 81-75
81-79† 81-92† 81-98† 82-18 82-53†

Suspension
80-03

Termination
76-02† 81-114† 82-118† 83-76

Withholding of Grant Funds
80-83† 80-104

Grant Related Income

Generally
81-68

Interest on Grant Funds

Earned
79-18† 80-13† 80-50† 80-57 80-58 80-71
80-83† 81-37† 81-52 81-58 82-06† 82-53†
82-133†

Imputed
79-18†† 80-13†† 81-86 81-102 81-106

Grant Types

Advance Payment
80-50† 81-37† 82-06† 82-133†

Reimbursement
80-50† 81-37† 82-06† 82-44† 82-133†

Grantee's Management Responsibilities

Financial Management

81-16† 81-114† 82-80†

Project Management

79-10† 79-36††† 79-38 80-52† 80-54† 80-80†
80-109† 81-02† 81-33† 81-115† 82-17† 82-23†
83-19† 83-33†

Grantor's Responsibilities

81-69† 81-78† 82-03†

Subagreements

Change Orders

75-37† 79-18 79-36† 80-07† 80-14 80-19
80-26 80-40 80-75 80-83† 80-94 80-101†
81-21† 81-33††† 81-35† 81-39 81-71† 81-86
81-98† 81-107† 82-03† 82-16 82-36 82-45
82-53† 82-60† 82-103 82-105†

Compensation

79-18† †† 79-43† 80-01† 80-13† †† 80-52† 81-21†
81-36† 81-77† 80-39† 80-54† 80-80† 81-62†
81-97† 81-98† 81-21† 82-90 83-33†

Contract Clauses

Escalation Clause

82-60†

Generally

76-15† 80-23† 81-97† 83-06†

Contractor's Failure to Perform

80-54† 81-23††† 81-89†

Cost and Pricing Data

79-15† 80-52† 80-81†

Generally
80-17 80-23††† 80-81† 81-08 81-22

Interest on Fees Paid
80-54†

Minority and Women's Business Enterprise Requirements
81-96† 82-03†

Procurement

Formally Advertised
75-37† 82-03† 82-19†

Negotiated
75-37† 82-03†

Types

Cost Plus

Fixed Fee
81-22† 81-21† 81-23††† 81-49† 82-20†

Multiplier
79-43† 80-52† 81-21

Percentage of Construction Cost
79-18† 79-43† 79-47† 80-39† 80-52†
80-85† 81-16† 81-22† 81-97† 81-98†
81-112† 82-112† 83-33†

Percentage of Cost
78-28 80-13† 80-16 80-34 80-55
80-68 80-71 80-85

Fixed Price
80-30 80-39† 80-52† 81-49† 81-69† 81-77†

Uniform Relocation and Real Property Act
77-20†

CHRONOLOGICAL LIST OF ASSISTANCE APPEALS DECISIONS AND OTHER SELECTED DETERMINATIONS

Docket No.	Assistance Appeal Case Name	Date of Decision
76-04	City and Borough of Juneau, Alaska	7-28-76
75-01	City of Warren, Michigan	5-25-77
76-01	City of Arnold, Missouri	6-30-77
75-30	City of Washington, Missouri	8-15-77
75-37	City of Spokane, Washington	11-30-77
77-18	City of Sycamore, Illinois	12-29-78
75-03	Kansas Turnpike Authority	3-02-79
77-20	City of Columbia, South Carolina	4-27-79
76-02	Brooklawn Dairy Farm	5-08-79
75-06	City of Casselberry, Florida	8-08-79
74-08/74-09	Western Monmouth Utilities Authority	9-21-79
77-02	Wheaton Sanitary District	10-04-79
75-05	Uwchlan Township Municipal Authority	11-26-79
75-14	City of Terre Haute, Indiana	12-21-79
78-01	Village of Deer Creek, Illinois	1-04-80
78-23	City of Kansas City, Kansas (Ruling on Motion)	1-17-80
76-21	Harriman, Tennessee	1-23-80
76-16	Cowlitz County, Washington	1-24-80
76-18	Heart of the Valley Metropolitan Sewerage District, Wisconsin	2-28-80
77-21	City of McEwen, Tennessee (Ruling on Motion)	3-05-80
77-22	City of Fairfield, California	3-05-80

Docket No.	Assistance Appeal Case Name	Date of Decision
75-07	Rice Water Supply and Sewer Services Corporation, Rice, Texas	3-20-80
79-38	Louisville and Jefferson County M.S.D., Kentucky (Order)	3-25-80
74-12/75-15	City of Fort Wayne, Indiana	4-01-80
75-06/74-08 74-09/75-05	City of Casselberry, Florida, et al., (Reconsideration)	4-18-80
75-19	City of Batavia, Illinois	4-28-80
75-13	City of Columbus, Ohio	5-22-80
79-34	City of Olympia, Washington	5-22-80
75-12	Stark County, Ohio	6-16-80
77-13	Village of Elburn, Illinois	6-20-80
75-17	City of Willoughby, Ohio	7-01-80
75-25	City of Miama Beach, Florida	7-15-80
75-21	City of Joliet, Illinois	7-21-80
75-10	City of Maple Heights, Ohio	7-24-80
79-15	Sacramento Regional County Sanitation District, California	7-29-80
75-39	Sanitary District of Elgin, Illinois	9-02-80
80-31	City of Sanborn, Iowa	9-15-80
75-41	Village of Milan, Illinois	9-30-80
75-06/74-08 74-08/75-05	City of Casselberry, Florida, et al. (Reconsideration)	10-01-80
79-33	Clarksville, Tennessee	11-07-80
78-17	City of Columbus, Ohio	12-02-80
80-48	Town of Hampton, New Hampshire	12-12-80
80-103	The City of Orlando, Florida	12-12-80

Docket No.	Assistance Appeal Case Name	Date of Decision
75-36	Hiwassee Utilities Commission	12-09-80
75-38	Douglas County Sewer Improvement District, No. 1, Nevada	12-16-80
80-103	Orange County, Florida (Formerly known as The City of Orlando, Florida) (Order)	1-26-81
80-23	City of Reno, Nevada	2-10-81
79-18/80-13	County Sanitation Districts of Los Angeles County	2-10-81
77-06	City of Gary Indiana Air Pollution Control Agency	2-20-81
75-23	Cambell, Ohio	3-06-81
79-12	City of Olathe, Kansas	3-18-81
79-49	Carlstadt Sewerage Authority	4-13-81
75-11	City of Springfield, Ohio	4-18-81
79-42	Mt. Pleasant, Michigan	5-15-81
79-16	City of Clyde, Ohio	6-12-81
80-106	Laurel, Mississippi	7-16-81
81-103	Ocean County Utilities Authority (Order)	11-20-81
81-108	Cape May Center Municipal Utilities Authority	11-30-81
75-09	Maryville, Tennessee	3-24-82
80-77	St. Joseph County Health Department, South Bend, Indiana	4-01-82
80-105	City of Wichita, Kansas	4-16-82
76-15	City and Borough of Juneau, Alaska	4-26-82
80-83	Midway Community Services District	4-26-82
79-36	Spring City, Tennessee	4-29-82
80-76	Contra Costa County Sanitation District Pittsburg, California	4-29-82

Docket No.	Assistance Appeal Case Name	Date of Decision
75-16	Pewaukee, Wisconsin	5-05-82
80-63	Clark County, Nevada	5-11-82
80-116	Laurel, Mississippi	5-17-82
81-16	City of Rockwood, Tennessee (Order)	5-25-82
80-81	San Francisco Clean Water Program	5-28-82
81-06/81-43	Northeast Sacramento County Sanitation District	6-23-82
80-101	Town of Clark Hills, Indiana	6-30-82
80-109	Town of Valdese, North Carolina	6-30-82
81-23	City of Montague, California	6-30-82
81-67	City of Angels, California	6-30-82
81-35	Montgomery County, Ohio	7-30-82
81-115	Village of Monroe, Ohio	7-30-82
77-21	City of McEwen, Tennessee	8-02-82
79-08	Indiana State Board of Health	8-25-82
81-54	Upland, Indiana	8-26-82
76-20	City of Richland, Missouri	8-30-82
79-09	City of Flint, Michigan	8-30-82
80-97	Keystone - Mt. Rushmore Sanitary District, South Dakota	8-30-82
82-16	Joint Meeting of Essex and Union Counties, New Jersey	8-30-82
78-26	City of Casselberry, Florida	8-31-82
79-43	Bolinas Community Public Utility District	8-31-82
80-113	City of Fort Wayne, Indiana	8-31-82
79-25	City of Youngstown, Ohio	9-02-82
79-36	Spring City, Tennessee (Reconsideration)	9-29-82

Docket No.	Assistance Appeal Case Name	Date of Decision
77-15	Metropolitan Sanitary District of Greater Chicago	9-30-82
81-02	Town of Tonasket, Washington	9-30-82
81-33	City of East Ridge, Tennessee	9-30-82
81-19	Atlantic City Municipal Utilities Authority	10-28-82
80-85	Crystal Bay General Improvement District, Nevada	10-29-82
81-69	Big Sandy Public Service District	10-29-82
81-89	City of Rohnert Park, California	10-29-82
74-08/74-09	Western Monmouth Utilities Authority, New Jersey (Ruling on Motion)	11-01-82
82-24	Modesto, California	11-23-82
79-10	Lake County, Illinois, Public Works Department	11-30-82
80-22	Calhoun County Department of Public Works, Calhoun County, Michigan	11-30-82
80-54	Mendocino City Community Services District, California	11-30-82
80-79	Leadsville Public Service District, West Virginia	11-30-82
81-96	Sioux Falls, South Dakota	11-30-82
82-53	City of Coffeeville, Mississippi	11-30-82
79-48	Northglenn, Colorado (Ruling on Motion)	12-02-82
78-06	City of Anderson, Indiana	12-21-82
80-18/80-26 80-55/80-56 80-60/80-61 80-64/80-69	East Bay Dischargers Authority (Ruling on Motion)	12-22-82
81-33	East Ridge, Tennessee (Reconsideration)	12-22-82

Docket No.	Assistance Appeal Case Name	Date of Decision
80-07	Pima County, Arizona	12-23-82
81-23	City of Montague, California (Reconsideration)	12-23-82
81-79	Metropolitan Sewer District of Greater Cincinnati	12-28-82
79-18/80-13	County Sanitation Districts of Los Angeles (Ruling on Motion)	12-29-82
80-50/81-37 82-06/82-133	County of Sacramento, California	12-30-82
80-52	City of Greenfield, California	12-30-82
82-19	Town of Cusick, Washington	1-10-83
81-16	City of Rockwood, Tennessee	1-06-83
81-03	Muskegon County, Michigan Department of Public Works	1-31-83
81-114	Summit County, Ohio	1-31-83
82-03	Allegan County, Michigan	1-31-83
82-17	Marquette County Department of Public Works	1-31-83
80-28	Lake County, Indiana	2-24-83
81-36	Roads End Sanitary District	2-28-83
81-77	Chagrin Falls, Ohio	2-28-83
81-98	City of St. Charles, Missouri	2-28-83
82-20	City of Cambridge, Nebraska	2-28-83
80-39	City of Rocky Mount, North Carolina	3-31-83
81-49	Red Sulphur Public Service District	3-31-83
81-78	City of Oberlin, Ohio	3-31-83
81-92	State of Michigan, Department of Natural Resources	3-31-83
82-30	City of Seattle, Washington	3-31-83

Docket No.	Assistance Appeal Case Name	Date of Decision
81-110	Monticello, Minnesota (Order)	4-27-83
81-107	Naperville, Illinois	4-27-83
82-23	Town of Mantachie, Mississippi	4-27-83
80-80	Humboldt Bay Wastewater Authority and Winzler & Kelly	4-28-83
82-37	City of Bakersfield, California (Order)	4-28-83
79-29	Regional Air Pollution Control Agency, Dayton, Ohio	4-29-83
78-14/78-15 78-19/78-20	City of Maitland, Florida, et al. (Order)	5-03-83
81-97	Metropolitan Waste Control Commission, Minnesota	5-11-83
82-44	Okanagon County, Washington	5-13-83
81-112	City of Spencer, West Virginia	5-31-83
80-03	Fallbrook Sanitary District, Calif.	6-07-83
82-93	Tranquillity Public Utility District	6-07-83
80-98	Sewerage Commission - Oroville Region (Ruling on motions)	6-27-83
82-57	Webster Springs Public Service District	6-27-83
82-54	Metropolitan Waste Control Commission, Twin Cities Area	6-29-83
82-77	Jeffersontown Water and Sewerage Commission	6-29-83
82-29	Iona - Bonneville Sewer Dist.	6-29-83
79-38	Louisville and Jefferson County Metropolitan Sewer District	6-30-83
79-43	Bolinas Community Public Utility District (Reconsideration)	6-30-83

Docket No.	Assistance Appeal Case Name	Date of Decision
82-12	Western Michigan Shoreline Regional Development Comm.	7-22-83
81-80	Wayne County Dept. of Public Works (Order)	7-22-83
82-10	City of Troy, Missouri	7-27-83
80-51	San Berdardino County, California	7-28-83
81-57	Grand Forks, North Dakota	7-28-83
82-80	Harrison Township, Pennsylvania	7-28-83
82-113	Uwchlan Township Municipal Authority	7-28-83
81-109	City of Stockbridge, Georgia	7-29-83
82-60	City of Flint, Michigan	7-29-83
83-19	Pacific City Sanitary District, Oregon	7-29-83
81-19	Atlantic City Municipal Utilities Authority (Reconsideration)	8-03-93
81-42	Joseph City Sanitary District, Arizona	8-10-83
81-71	Wood County Parks and Recreation Commission, Waverly, West Virginia	8-10-83
82-37	City of Bakersfield, California	8-10-83
82-48	Russian River County Sanitary District Sonoma County, California	8-10-83
82-94	Maryland Environmental Services	8-10-83
82-97	Dushore Sewer Authority, Pennsylvania	8-16-83
74-13	MSD of Greater Chicago (Order)	8-17-83
82-57	Webster Springs Public Service District (Reconsideration)	8-17-83
81-38	City of Toledo, Ohio	8-31-83

Docket No.	Assistance Appeal Case Name	Date of Decision
80-39	City of Rocky Mount, North Carolina (Reconsideration)	8-29-83
81-38	City of Toledo, Ohio	8-31-83
81-99	Louisville and Jefferson County MSD	8-31-83
81-24	City of Coronado, California (Order)	9-16-83
78-04	Occoquan Woodbridge Sanitary District	9-20-83
79-47	City of Kansas City, Kansas	9-30-83
82-119	Amity Township Municipal Authority, Pennsylvania	9-30-83
82-122	Genesee - Lapeer - Shiawassee Region V Planning Development Commission	9-30-83
80-41	Pima Association of Governments, Arizona	10-17-83
82-112	Town of Poseyville, Indiana	10-21-83
82-105	Gloucester County Utilities Authority, New Jersey	10-27-83
82-110	City of Elkhart, Indiana	10-28-83
81-22	Wheeling Sanitary Board, City of Wheeling, West Virginia	10-31-83
80-80	Humboldt Bay Wastewater Authority and Winzler & Kelly	11-17-83
80-01	Colorado River Sewage System Joint Venture	11-30-83
81-21	City of Boise, Idaho	11-30-83
81-84	Metropolitan Waste Control Commission	11-30-83
81-62	City of Stubenville, Ohio (Order)	11-30-83
82-55	Kent County, Michigan	11-30-83

Docket No.	Assistance Appeal Case Name	Date of Decision
83-126	Nassau County, New York (Order)	12-28-83
83-137	Nassau County Department of Public Works (Order)	12-29-83
82-118	Jefferson County Water District, No. 10, Nederland, Texas	12-29-83
83-33	City of Omro, Wisconsin	12-30-83
83-132	Carroll Township Authority, Virginia (Order)	12-30-83
82-26	Town of Hanover, New Hampshire (Order)	1-13-84
83-06	City of Hoquiam, Washington	1-13-84